



NEBRASKA
DEPT. OF WATER, ENERGY, AND ENVIRONMENT

N
EXTENSION
Pesticide Safety Education Program

**University of Nebraska Extension
Institute of Agriculture and Natural Resources
and the
Nebraska Department of Water, Energy, and Environment**

Extension is a Division of the Institute of Agriculture and Natural Resources at the University of Nebraska–Lincoln cooperating with the Counties and the United States Department of Agriculture.

The University of Nebraska does not discriminate based upon any protected status. Please see go.unl.edu/nondiscrimination.

© 2026, The Board of Regents of the University of Nebraska on behalf of Nebraska Extension. All rights reserved.

Table of Contents

Chemigation Links.....	iii
Acknowledgements.....	iii
Introduction.....	1
Factors Affecting Chemigation Practice	1
Irrigation Systems.....	5
Chemigation Equipment and Safety Devices.....	8
Management.....	17
Calibration Procedures	21
Laws and Regulations.....	30
Appendix A Summary - Nebraska Chemigation Act.....	36
Appendix B NDWEE Rules and Regulations Pertaining to Chemigation	39
Appendix C Leakage Test	49
Appendix D Certified Chemigation Check Valve Models.....	50
Appendix E Calculating Irrigated Acreages.....	52
Appendix F Fertilizer and Pesticide Containment.....	57
Appendix G Disposing of Livestock Waste Through an Irrigation Distribution Systems.....	59
Appendix H Nebraska Natural Resources Districts.....	61
UNL Extension Publications	64

Disclaimer

Reference to commercial products or trade names is made with the understanding that no discrimination is intended for those not mentioned and no endorsement by Nebraska Extension is implied for those mentioned.

Chemigation Links

Chemigation - <https://pested.unl.edu/training-and-certification/chemigation/>

Chemigation Training Manual -

Calibration Workbook - <https://go.unl.edu/chemigationcalibrationworkbook>

Chemigation Calculator Spreadsheet V2 - https://go.unl.edu/chemigationcalculatorv2_0

NDWEE Chemigation website --<https://dee.nebraska.gov/land-waste/agriculture/chemigation-program>

NDWEE FAQ --<https://dee.nebraska.gov/forms/publications-grants-forms/04-152>

Using Chemigation Safely and Effectively

Written By:

Chuck Burr, Steve Melvin, Gary Stone, Aaron Nygren, Amy Timmerman, Jennifer Weisbrod, & Bruno Patias Lena

ATTENTION: With the passage of LB317, on July 1, 2025, the merger of the Department of Natural Resources with the Department of Environment and Energy occurred and the name was changed to the **Nebraska Department of Water, Energy, and Environment**. The Chemigation Manual, Calibration Workbook, and Certification Exam will reflect this change and will be replaced with **Nebraska Department of Water, Energy, and Environment (NDWEE)**, which was formerly known as **Nebraska Department of Environment and Energy (NDEE)**

Acknowledgements

This edition of the Nebraska chemigation training manual has been published in response to changes in state and federal laws and comments from instructors. Other changes were made at the recommendation of several Nebraska Natural Resources Districts (NRDs).

Special thanks also are extended to Valmont Industries and Lindsay Corp. for granting permission to reproduce pages from their design guide on calculating irrigated acres.

Finally, this publication was originally written by a work group consisting of Ed Vitzthum, DeLynn Hay, John Witkowski, and William Kranz under a contract with the US Department of Agriculture. Technical contributions were provided by Dean Eisenhauer, Professor of Biological Systems Engineering Department; Darrell Watts, Professor Emeritus; Jose Payero, formerly Associate Professor, West Central Research and Extension Center; Gary Buttermore, Nebraska Department of Environmental Quality; Gary Newton, Agri-Inject, Inc.; Marc Anderson, Private Consultant; Gene Ross, Nelson Irrigation; Dale Christensen, Valmont Mfg; and Dave Aiken, UNL Extension Water Law Specialist.

This draft- of the manual was substantially improved in 2016 thanks to critiques and comments from both internal and external reviewers, including: Dean Yonts, Panhandle Research and Extension Center; Jim Schild, Scottsbluff County Extension Educator; Tom Trewhitt, Nebraska Department of Environmental Quality; Dick Erhman, Nebraska Department of Environment and Energy; and Chuck Burr, Phelps County Extension Educator.

William Kranz, Editor

Introduction

Chemigation is the term commonly used to describe the practice of applying agrichemicals (i.e., fertilizer-including livestock waste, insecticides, herbicides, fungicides, nematicides, and other chemicals) through an irrigation distribution system.

As irrigation technology has become increasingly more sophisticated over recent decades, chemigation is common in Nebraska. Unquestionably, the widespread use of the practice is attributable, at least in part, to the several advantages it offers producers.

- Excellent uniformity of chemical application.
- Irrigation systems are multifunctional and provide necessary water input but also double as application equipment. This makes them a dual-purpose investment and a more viable option to save on cost. New technology also provides a system for chemigation that allows precision application of chemicals.
- Prescription application of chemicals.
- Chemicals often require moisture to become activated or to incorporate at a desired depth. Chemigation makes chemical incorporation and activation easy due to the use of water.
- Less invasive equipment, like an irrigation system, can reduce soil compaction and physical injury to crops. Less injury to crops and healthier soil increases potential yield and reduces cost of soil management.
- Many chemicals (including fertilizers) pose a risk to human health. Using an irrigation system to apply chemicals allows the operator to be outside of the application zone during application. There are also few mixing/loading events required during chemigation. This protects applicators from harm.
- Potential reduction of chemical requirements.
- Potential reduction of adverse environmental impacts.
- Drift of chemicals may be reduced in areas beyond the planned application zone when compared to other conventional application methods, especially during windy days.
- Chemigation may save 40% or more over the cost of conventional means of application.
- Effectiveness.

While there are advantages to chemigation, there are also some disadvantages and concerns:

- There is an increased potential for contamination of water sources such as ground water and nearby streams, lakes, and rivers.
- There may be an increase in application time when compared to other methods of application. Climatic conditions can also affect the application.
- The practice requires more intensive management on the part of the producer.
- There is a possibility of chemicals reacting with equipment and causing corrosion.
- Some pesticides cannot be used in an irrigation system. The label will indicate if Chemigation is allowed. |

- Human and environmental safety considerations
- Additional equipment is required to modify the irrigation system to bring it into compliance. Equipment may also malfunction during the application causing misapplication, human exposure, or environmental contamination. Inspection of equipment with fees associated are also required.

It is the last of the disadvantages that prompted passage of the Nebraska Chemigation Act and subsequent adoption of regulations requiring training and certification of persons who chemigate. This publication, and other materials, are intended as references for producers and others seeking certification as chemigators. It is intended solely as a guide for safe and effective chemigation. Information in this publication should never be used in place of directions contained in chemical injection and irrigation system operator manuals and/or chemical product labels and labeling.

After completion of the training an exam is administered that must be passed at least a 70%. Passing the exam is the only way to receive certification. The Nebraska Department of Water, Energy, and Environment will then process your information and mail out the chemigation license. Equipment inspection and certification is completed by the local NRD and may vary by region. Permits will be denied if the applicator doesn't meet the requirements outlined in Title 195 in Appendix B.

Factors Affecting Chemigation

Regardless of whether a fertilizer or pesticide will be applied, the first consideration is the growing crop needs. The decision to apply a pesticide, for example, may be based on the producer or certified crop advisor scouting the field determining that a pest is present in numbers exceeding the economic threshold. Further assessment of the treatment site locations should include consideration of how close the irrigation system is to sensitive residential areas, labor camps, occupied buildings, hospitals, schools, parks, greenhouses, neighboring crops, rivers, lakes, ponds, roadways and public water systems. Chemigation over irrigation canals and other bodies of water is illegal. Off target applications of pesticides through chemigation is also illegal.

Irrigation System Location

Equally important, especially when a pesticide is to be applied, is ensuring that the application does not endanger human health and safety, domestic animals, fish and wildlife (especially any endangered or threatened species), groundwater or surface water sources, or neighboring crops. Applications over roadways or in close proximity to occupied buildings (e.g., an adjacent residential area) must be avoided. When applicable, pesticide use restrictions such as those listed above, are always found on product labels. Pesticide labels and labeling have the force of law; failure to comply may result in prosecution. Restrictions also may apply if wells used for chemigation are near municipal water wells and wellhead protection areas. Check with local regulatory agencies about such restrictions before chemigating.

Not all irrigation systems may be in the best location for chemigation. It is important to evaluate the site you plan to use and determine if the benefits outweigh the risks. This may include evaluation of drift and runoff potential, soil characteristics, topography, and irrigation use and maintenance. Evaluation of the site should also account for chemicals, fertilizers or pesticides, the applicator would likely apply. Assessment of the treatment site should also

consider the distance of the irrigation system from sensitive areas (waterways, housing districts, hospitals, schools, nearby crops or greenhouses, and neighbors). Fertilizers and pesticides can cause irritation of eyes and have strong smells associated with them. This can be especially concerning if the irrigation system maybe near a sensitive area where people live or work; follow label recommendations.

Drift and Runoff Potential

Potential for drift or runoff – or both – should be high on the list of concerns for any producer planning to chemigate. Pesticide labels prohibit both; thus, whenever either occurs, it is a label violation and the person responsible is subject to prosecution.

Common sense may dictate more restrictive procedures than the label relating to the avoidance of wind drift and runoff. Any chemical loss from the target area, or any damage to nontarget crops, causes additional and unnecessary production expenses. Add to that the potential costs for environmental damage, and there are more than enough reasons to avoid drift and runoff. In addition, there is often language on the label that covers wind advisory or water advisory statements.

Drift potential during a chemigation event can be affected by several variables. Among them are: system type (volume gun, center pivot with end gun, solid set), sprinkler type and position, operating pressure, droplet size, use/nonuse of an adjuvant, and weather conditions at the time of the application. It is important to check the wind speed before application. High wind conditions can affect the uniformity of the spray causing a less effective application. Drift onto nearby non-target crops or organisms can potentially cause damage. Temperature is also important and some labels will state the proper temperature range to apply a product. It is imperative that these temperature guidelines be followed. Many products will become less effective in extreme temperatures, and some will become too effective and damage your crop. Both situations can cause a loss of money on products that didn't do their job effectively.

Researchers at the University of Nebraska-Lincoln's Haskell Agricultural Lab applied an insecticide with crop oil to R3 stage corn through a 1,260-ft. long center pivot equipped with high angle, high pressure (60psi) impact sprinklers. They found significant amounts of the pesticide at monitoring stations as far as 330 ft. from the end of the pivot. When applied without crop oil, residues declined markedly at a distance of 200-265 ft. from the end of the pivot. Drift in both cases was concentrated directly in line with the direction of air movement. Wind speed during the study averaged just under 14 miles per hour (Byers, et al, 1993). Many systems today use lower angle, truss rod height sprinkler packages that reduce the potential for drift. However, drift should always be considered in application.

Runoff can occur whenever the irrigation system is applying water at a rate greater than the infiltration rate of the soil. The occurrence of runoff depends not only on the irrigation system application rate and soil water infiltration rate, but also factors such as the field slope, soil surface roughness, depth of water applied, and the presence of a crop canopy or residue. Runoff during chemigation may pose a potential hazard to groundwater and surface water, livestock, adjacent crops, and wildlife. Chemically treated water must remain on the field or application site and the chemigator must contain the chemically treated water if runoff occurs.

Relatively high application rates are characteristic of the outer portion of center pivot irrigation systems, especially those operating at low pressures. Care should be taken to ensure that the sprinkler package is matched to field conditions. Depending on the type of chemical being applied and soil characteristics, the amount of water being used to apply the chemical can usually

be adjusted to prevent runoff.

Soil Characteristics

Soils can differ considerably over relatively short distances. Several different soil textures are commonly found within a single field. The rate at which water and/or agricultural chemical(s) enter the soil (infiltration rate) differs according to soil texture. Thus, variations in soil texture will influence irrigation system management and chemigation operations.

For example, coarse-textured sandy soils have high infiltration rates. Assuming that other factors are equal (e.g., slope, compaction), there is less potential for runoff on coarse-textured soils than on fine-textured silty or clayey soils that have lower infiltration rates.

On coarse-textured sandy soils, chemigating with excessive amounts of irrigation water could result in leaching the chemical(s) below the crop root zone. Where fine-textured, clayey soils are to be chemigated, the situation is reversed. The potential for deep percolation of water and/or chemical(s) is decreased, but the potential for runoff increases.

Soils can also be saturated with water increasing the potential for runoff. Monitoring tools can be used to track soil moisture content and depth of saturation.

Understanding the soil in a field can help an operator make important decisions such as rate of application, when to apply, and even what products are best to apply. Consult Natural Resources Conservation Service (NRCS) soil survey maps for specific soil characteristics. They can be found at web soil survey located at <https://websoilsurvey.sc.egov.usda.gov/App/HomePage.htm> or at your local NRCS office. Nebraska Extension, NRCS, and Natural Resources District (NRD) personnel, as well as certified crop consultants, can provide assistance with irrigation management.

Topography

The topography of the field can substantially affect uniformity of water application through sprinkler irrigation systems lacking sprinklers with pressure regulators. Differences in elevation along the length of the sprinkler system will cause differences in pressure at each nozzle outlet. This results in uneven water distribution, especially with low pressure systems. Sprinkler irrigation systems without pressure regulators may be unsuitable for chemigation. Maintaining pressure regulators are important for proper distribution. The industry recommendation is to replace pressure regulators every 10 years or 10,000 hours.



Sloping terrain such as that pictured here increases runoff potential.

Irrigation System Characteristics

Physical characteristics of an irrigation system can affect the capacity for applying agricultural chemicals. Most irrigation systems can be used to apply fertilizers or pesticides that must be incorporated into soil. However, only a sprinkler system can be used where foliar application is needed. Developments in sprinkler packages allow irrigators to install nozzles at various distances from the soil surface using several different nozzle types. Keep in mind that chemicals go where the water goes, low nozzles may not properly apply to the whole canopy. Any system used to chemigate must have the appropriate injection equipment and anti-pollution safety devices installed, and the entire system must be in good working order. The section titled “Chemigation Equipment and Safety Devices” discusses system equipment requirements in detail.

Calibration

Accurate calibration of the chemical injection system is critical. Without calibration there is no way to determine whether the amount of chemical applied is too much, too little, or – by chance – just right. Over-application is needlessly expensive and if a pesticide is over-applied, the person responsible can be prosecuted for misuse of a pesticide. Under-application frequently does not provide the desired effect and can result in pesticide resistance development in the pest population. See the section on Calibration Procedures for additional information.


Uniformity

When deciding if chemigation should be used with a sprinkler system, consider the uniformity of water and chemical application. The versatility of center pivot and some linear-move sprinkler systems allow them to irrigate a broad range of field shapes using end guns and corner systems. Technological advances have led to improvements in the water application by these systems. Uniformity is imperative to the control of pests within a field.

End Guns

End guns can add more than 10 acres to the irrigated area of the center pivot if operated for the entire revolution. Intermittent use of end guns to accommodate roads, fence lines, or farmsteads will result in different irrigated areas when the end gun is on than when it is off. Thus, when a system is calibrated with the end gun off, fixed rate chemical injection pumps will apply less chemical per acre when the end gun is on. The opposite is true if calibration occurs with the end gun on. This leads to nonuniform chemical application that can sometimes be seen from the air.

The water application pattern of end guns is also affected by wind speed and direction. Where wind direction is parallel with the sprinkler system, it reduces the sprinkler throw or wetted radius significantly. Water and chemical meant for the area outside the main system can be deposited within the main irrigated area. A crosswind elongates the pattern in the direction parallel with the wind direction and reduces the pattern width in the direction perpendicular to the wind direction. (See figure below). Some pesticide labels may not allow for the use of end guns on a pivot system. It is important to read the label prior to application to ensure the correct equipment is used.

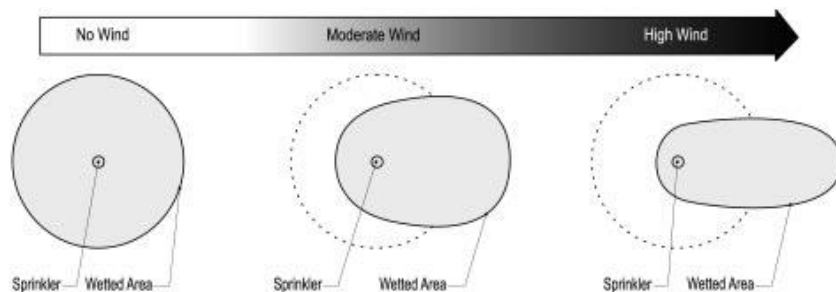

Wind impact on low pressure spray head on 5' drop

Corner Systems

When the center pivot includes a corner system, the potential difference in application rate is much greater. Center pivot manufacturers have incorporated this fact into their designs. In all cases, the main system is slowed down as the corner arm extends and speeds up as the corner arm retracts. In this way the area irrigated per hour is kept very similar to when the corner system is retracted. There are two ways to deal with water application as the corner system extends outward:

- 1) *Increase the flow rate into the system to account for the added acres of the corner arm.* If successful, this would ensure that chemical application is similar for the entire irrigated area. The downside is that the main portion of the system applies more water when the corner is extended than when it is retracted. For this reason, the overall difference in depth between corner and non-corner areas depends on the length of the corner arm and how many times water and chemical is applied to the field.
- 2) *Reduce the flow rate to the main system to account for the added acres of the corner arm.*

This is accomplished by turning off some sprinklers on the main system as the arm extends. If successful, this would ensure that both water and chemical are applied at the same rate regardless of whether the corner is extended or not. The downside is that by turning off some sprinklers on the main system, water application uniformity is sacrificed for the main system. It is possible that the reduced uniformity may not affect yield, but the potential for yield impacts exists during high use irrigation seasons.

Sprinkler Spacing

One goal of both chemical and water applications is that both be distributed as uniformly as possible. Recent sprinkler package developments have raised some concerns about the effect of nozzle position on water application uniformity. Research conducted in Kansas and Nebraska has demonstrated that nozzles positioned to operate within a corn canopy can lead to dry areas between adjacent nozzles. When positioned within 4 feet of the soil surface, the crop canopy intercepts the water application pattern to limit water application to an area within 5 to 10 feet from the nozzle. Reducing nozzle spacings to less than 5 feet is the industry standard to ensure uniform water and chemical application when nozzles operate in the corn canopy.

Chemical Type

One of the most important considerations for chemigation is what will be applied through the

system. Pesticide labels will say if a product can be used in chemigation. Many products cannot be used in chemigation, and it is against the law to do so. Labels may also contain specific requirements for irrigation systems that the product can or cannot be used in. Remember to read the label. Some products may not only be listed as illegal, but the product may not be as effective when applied with a large quantity of water.

Irrigation Systems

There are three basic types of irrigation systems:

- sprinkler
- surface
- drip or trickle

Sprinkler Systems

There are several types of sprinkler systems and most are well-suited for chemigation. The sprinkler systems include:

- center pivot
- self-propelled linear move (linear)
- solid set
- hand move lateral
- side roll lateral
- tow-line lateral
- hose drag traveler

This manual focuses mainly on chemigating with center pivot and linear sprinkler systems. Sprinkler irrigation systems should have a uniformity of 80% with the pressure variation maximum not to exceed 20% along the lateral.

Center pivot, linear systems

Center pivot and linear systems are most commonly used for chemigation. When properly designed, calibrated, and operated, they provide a high degree of water and chemical application uniformity.

Center pivots can have a high rate of water application near the outer portions of the circle. If the soil infiltration rate is exceeded, runoff of the chemical-water solution may occur. Therefore, a nozzle package should be selected to minimize runoff potential. Work with an irrigation system dealer, NRCS, or Nebraska - Extension personnel to select a nozzle package to match the field and crop.

In some situations, the quantity of irrigation water applied with the agrichemical will be small enough that runoff may not be a major concern. The amount of water applied by a center pivot

during one irrigation is determined by the irrigation pumping rate, system length, and the revolution time of the center pivot system. The minimum irrigation amount will be applied when the system is operated at the maximum rotation speed. Consult your system operator's manual for specific system water application depth information.

Solid set, hand move, and tow lines

Each of these is a type of stationary sprinkler system. They differ from self-propelled systems in that they are set on a given area of the field and do not move while water is being applied. A limitation of hand move and tow line systems when used for chemigation is the potential for operator exposure to the chemical(s) being applied as the system is moved from one application site to the next. Another limitation of stationary systems is distortion of the water distribution by wind. Chemicals should not be applied through these systems if wind causes the spray to drift to nontarget areas.

Hose drag traveler

This type of system may be acceptable for chemigating when operated in low wind conditions. In general, travelers have poor application uniformity and their susceptibility to wind drift limits suitability for chemigating. Like the stationary systems, the hose and volume gun equipment present a risk of chemical exposure. These two factors make a hose drag traveler a poor system for use with chemigation.

Furrow Irrigation Systems

In general, furrow irrigation systems have limited potential for chemigation. Water distribution is typically nonuniform along the row. It is possible to get a substantially better distribution than the average, but it requires more time than many producers feel they can devote to the effort. Further, since there is no possibility of foliar application, any chemigation would be limited to application of fertilizer solutions, most typically nitrogen.

More recently, the development of equipment and management guidelines for surge-flow irrigation has made it possible to obtain a more uniform water application in comparison to conventional furrow irrigation. With experience, it is possible to program surge valves to make relatively uniform water applications when field conditions are good. This has stimulated renewed interest in fertigating through surge irrigation. The question is whether surge can give consistently uniform water applications across a field, so the operator can have confidence that the fertilizer application is uniform from one end of the field to the other and from row to row.

The University of Nebraska has conducted research using surge irrigation to fertigate silt loam soils with good intake rates. The results have shown that when properly managed, the uniformity of water distribution under surge irrigation is clearly better than for typical furrow irrigation. However, point to point variation in infiltration along a row and from row to row raises serious questions about using fertigation in furrows as a standard practice to apply supplemental nitrogen. There was more non-uniformity in distribution from top to bottom of the field than would be desirable for fertilizer distribution. Not surprisingly, there also was a large difference in infiltration between wheel-track and non-wheel-track rows. Local infiltration variability related to soil condition resulted in substantially more infiltration of fertilizer materials at some points than others. In addition, there were row-to-row differences in infiltration and fertilizer distribution on

rows that were presumably identical in terms of tillage and wheel track history.

Runoff of high-nitrate water is another concern during fertigation with any furrow irrigation system. It is possible to operate a surge system to obtain nearly zero runoff. However, research on medium-textured soils in Nebraska has shown that this results in a nonuniform distribution along the furrow. Allowing some runoff to occur will usually provide a more even distribution along the row. This creates a problem of what to do with the high nitrate runoff water. If it goes to a reuse pit, it can become a point source of contamination. If it is held behind a dike at the end of the rows, it may result in areas of excessively high N application at the lower end of the field.

The University currently does not have research results on very fine textured soils such as silty clay loams, clay loams, etc. On soils with low intake rates, it may be easier to obtain a more uniform distribution along the row. However, the row-to-row variability because of compaction by tractor wheels, etc., and the issue of management of high nitrate runoff still remain as limiting factors.

Because research results show non-uniform application, and potential for groundwater and surface water contamination by high nitrate runoff, fertigating through either conventional or surge irrigation in furrows is not recommended on medium- and coarse-textured soils. An exception is emergency situations where weather or some other problem has kept machinery out of the field until the crop is too tall to get through with conventional equipment.

Drip or Trickle Systems

Drip or trickle irrigation consists of frequent, slow application of water to soils through emitters located at selected points along water delivery lines. Most drip lines are placed 12-16 inches below the ground (subsurface drip irrigation), but they can also be placed on the soil surface or suspended above the ground.

Most drip systems only apply water to a portion of the soil. While some emitters can apply water to a larger area using a spray nozzle style emitter, most systems are not designed to apply water uniformly to the entire crop canopy. Thus, drip systems usually are not suitable for broadcast or foliar applications.

Chemigation Equipment and Safety **Devices**

When using an irrigation system to apply chemicals one of the most important considerations is backflow prevention. Backflow is when water that has been injected with pesticides or fertilizers flows backwards into the water supply. Point-source pollution of a water supply puts a community at risk for exposure to chemicals in their drinking water. This manual primarily focuses on the prevention of backflow through equipment and application methods that reduce risk to the water supply. The equipment and processes discussed in this manual of a legal chemigation system help the operator make a safe, accurate application while simultaneously protecting the operator's community.

Equipment required to apply chemicals through an irrigation system includes:

- a chemical supply tank (with agitator)
- a chemical injection system
- a calibration tube
- required safety devices.

Chemical Supply Tank

To avoid potential reactions with chemicals placed in it, the chemical supply tank should be constructed of a corrosion-resistant material such as stainless steel or sunlight-resistant plastic. Some pesticide labels may include statements that a specific type of tank be used. Product labels also will include a warning if chemical interaction is a potential problem.

The tank should be designed to prevent any wind-borne foreign materials – dirt, leaves, crop residue – and rainwater from getting into the tank. It also should be completely drainable with a sump at the drain port for ease in rinsing. Accurate, gallon marks that are easy to read should be on the outside of the tank.


Some pesticides require agitation in the chemical tank (tank mixes, dry flowables, flowables, wettable powders, or any other suspended formulations). Hydraulic agitation may be sufficient for some soluble chemicals, while mechanical agitation may be necessary for other types of chemicals. *Refer to the product label for specific instructions.*

Chemical Injection System

A mechanically durable, reliable, and accurate chemical injection system, specifically designed for chemigating, is essential. Like the chemical supply tank, wettable parts should be made from stainless steel or other non-reactive materials. To help ensure uniform applications, a delivery accuracy of plus or minus one percent is desirable within the minimum to maximum operating range. It also should be easily adjusted while running.

When injecting chemicals, the use of variable injection pumps allows for adjustment of flow within the system accommodating the use of end guns, corner systems, and variable rate irrigation systems (VRI) during application. Variable rate injection pumps monitor the water flow to the system and adjust the injection rate accordingly.

The operating range of the injection pump should be consistent with intended chemical application rates. These can range from an ounce per acre for some insecticides to as much as 20 gallons per acre for some fertilizers. Consequently, injection rates may need to range from as low as 0.2 gallons per hour to as much as 100 gallons per hour, depending on the irrigated area. No single pump can do all jobs. Controls on most pumps are graduated in units or percentages that represent the amount of liquid pumped at a particular setting. However, these settings may not be exact. Avoid operating a pump near its minimum rated capacity. Such usage can result in inaccurate pumping rates. Piston pumps, in particular, lose suction capabilities proportionally as piston stroke length is reduced to pump smaller amounts. It always is best to operate the pump in the range from 10% to 100% of its rated capacity.

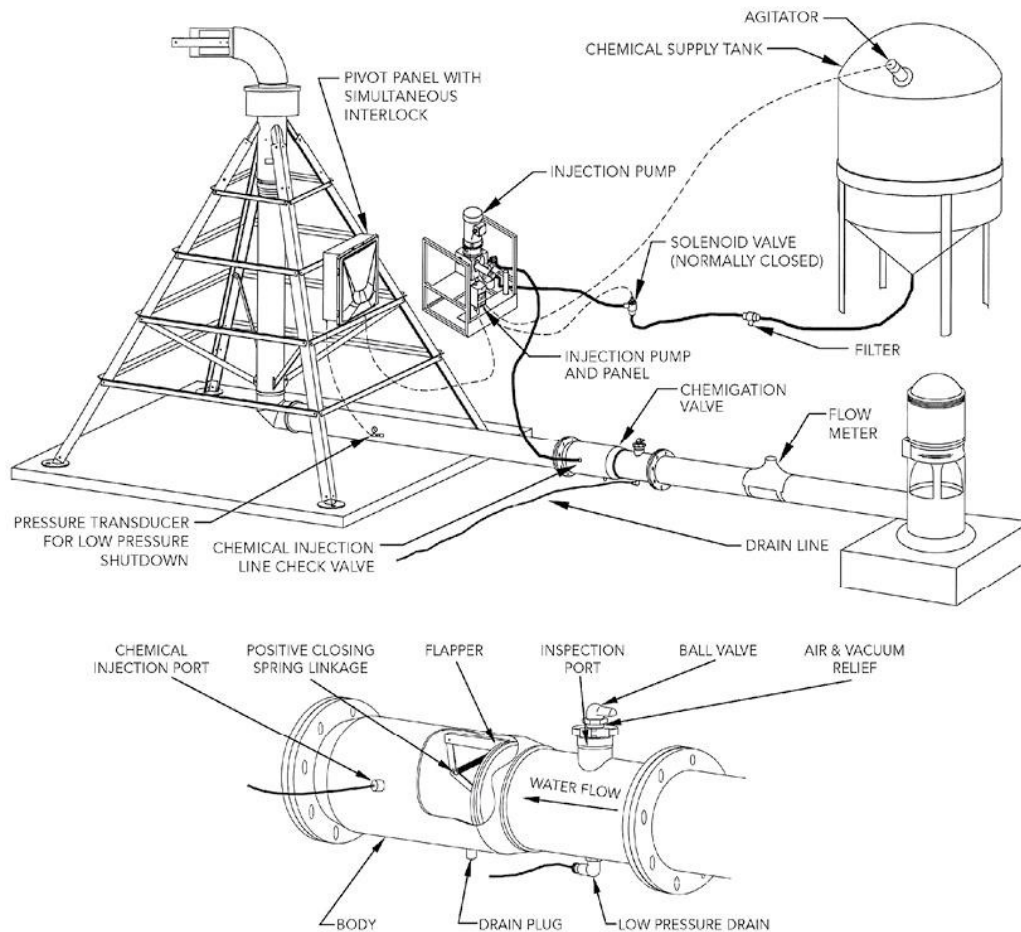

Typical injection components and layout of a chemigation system. © 2016-2022 Lindsay Corporation

Three main types of injection devices are used to add chemicals to irrigation water. Chemicals may be injected by: 1) centrifugal pump, 2) positive displacement pump, or 3) pressure differential methods including venturi meters and water-driven pumps. The two main types of chemical injection pumps used in Nebraska are listed under the broad category of positive displacement pumps. For application of Livestock waste through an irrigation system a centrifugal pump are typically used. For more information see EC778 Application of Liquid Animal Manures Using Center Pivot Irrigation Systems.

Piston pumps (figure 1) inject chemical into the irrigation water at a rate determined by the piston diameter, length of the stroke, and the number of strokes per minute. Since the chemical pump is most often driven by an electric motor or the power take-off of the engine powering the water pump, the number of strokes per minute is nearly constant and determined by the installation. Piston pumps are calibrated by adjusting the length of the piston stroke. To do this the pump must be shut off. Consequently, accurate calibrations are somewhat tedious. Chemical or fertilizer comes into direct contact with the piston and seat, allowing excessive wear and potential leakage to the environment. Moving parts, such as motor to gearbox coupling, eccentric arm, and plunger arm are generally exposed, creating danger to the operator and others.

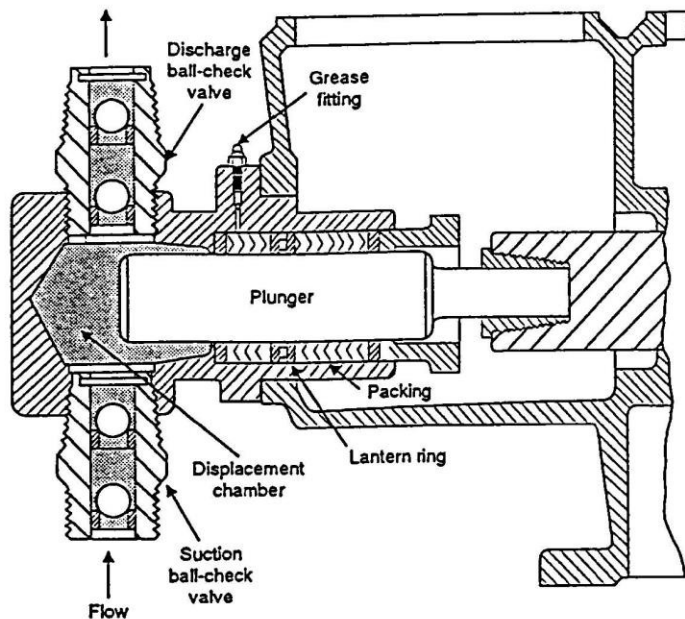


Figure 1. Cross-section drawing of the pump mechanism for a piston type chemical injection pump (Poynton, 1983).

Diaphragm pumps (figure 2) are so named because they have a membrane or diaphragm separating the drive mechanism from the product being pumped. The mode of action remains that of a positive displacement pump, but the chemical being pumped is not in direct contact with the piston. The chemical(s) to be injected determines the diaphragm material that is selected. Selecting an appropriate pump diaphragm will eliminate leakage problems that are associated with piston pumps. Advantages of a diaphragm pump include: a) easier to calibrate by simply turning an adjustment dial, b) easier to achieve precise injection rates due to fine gradations on the dial, and c) easier to adjust injection rates because the system does not need to be shut off for adjustment.

Venturi meters (figure 3) use the difference between the inlet and outlet pressure of the meter to add chemical into irrigation water. As water passes through the throat of the meter, pressure energy is converted to velocity energy. In the process, a nearly perfect vacuum is developed at the throat. The vacuum creates a pressure differential that causes chemical to be forced out of the chemical supply tank into the bypass line. The chemical injection rate is varied by using a needle valve or orifice plate placed in-line between the chemical supply tank and the meter. Systems with large pipelines place the venturi in a shunt or bypass line arrangement. To ensure that the pressure in the bypass line is greater than the mainline pressure, a booster pump is installed in the bypass line. This eliminates the need for artificially creating a pressure differential by installing a throttling valve in the mainline.

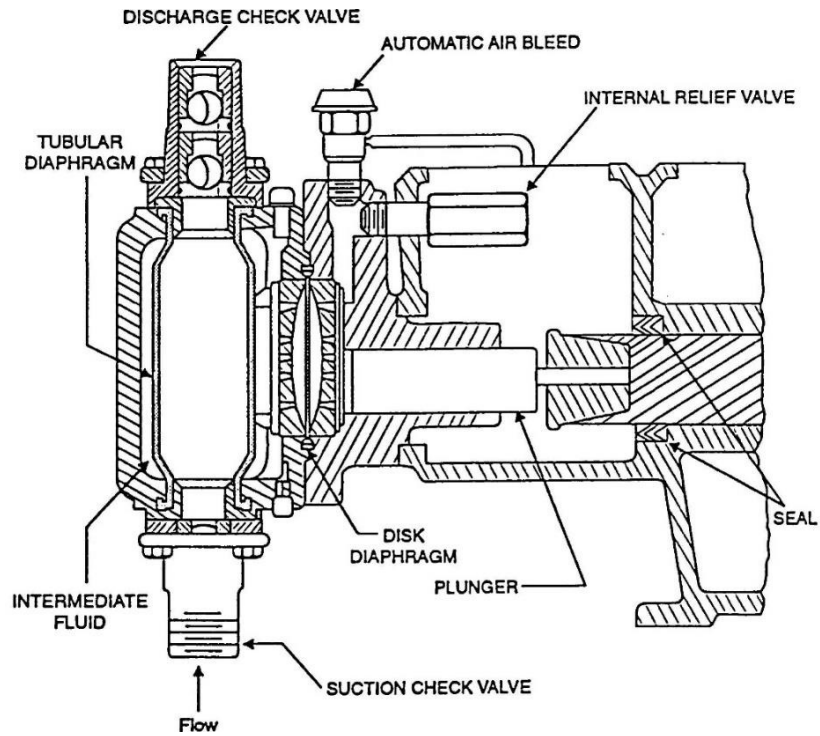


Figure 2. Cross-section drawing of the pump mechanism for a diaphragm type chemical injection pump (Poynton, 1983).

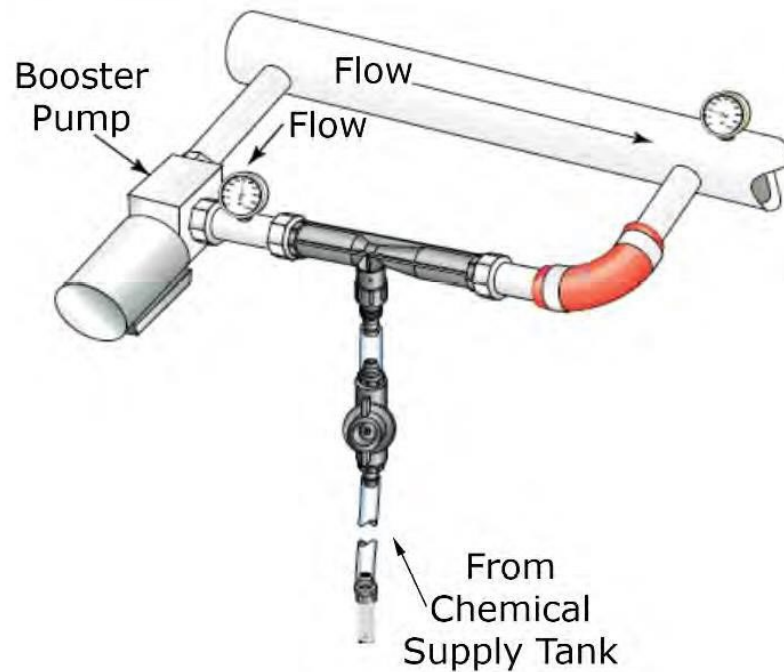


Figure 3. Schematic drawing of a venturi injector. Eisenhauer, D. E., Martin, D. L., Heeren, D. M. & Hoffman, G. J. (2021). Irrigation Systems Management, ASABE. doi:10.13031/ISM.2021, CC BY-NC-ND 4.0, <https://creativecommons.org/licenses/by-nc-nd/4.0/>

Venturi meters were primarily designed to operate in drip irrigation systems used for vegetable production and greenhouses. These systems typically have a water supply that can be maintained at a constant pressure. However, it is not recommended for center pivot use because water pressure supplied to center pivots in Nebraska varies due to uneven terrain, intermittent end guns use, and the pumping water level increases somewhat with pumping time. These factors cause the pipeline pressure to change, thus increasing or decreasing the chemical injection rate. Adding a booster pump greatly diminishes the effect of pressure differences on the injection rate, but, in general, the injection rate will vary depending on the pressure in the pipeline at the point of injection.

Calibration Tube

A calibration tube should be located in the chemical line between the chemical supply tank and the injection pump. It measures the output of the injection unit during calibration. It should be transparent for ease in viewing the liquid level, resistant to breakage, ultraviolet light (UV) stabilized (sunlight resistant), and graduated in units of volume (pints, ounces, milliliters, etc.). To properly calibrate an injection system, it is necessary to monitor the chemical injection rate for at least one minute and as long as five minutes. Therefore, calibration tubes must be large enough to hold the amount of chemical to be injected during that time. Capacity of the injection system will dictate the size of calibration tube. Fertilizer application will normally require a large 4,000-5,000 ml calibration tube while an insecticide should use a 1,000 ml calibration tube.

Required Safety Devices

A risk for polluting the water supply exists whenever proper safety devices are not installed and maintained on chemical injection and irrigation equipment. This problem has been addressed by industry, federal regulators, and state lawmakers. Three specific hazards are of concern if no safety equipment is present:

1. an unexpected shutdown of the irrigation pumping plant due to mechanical or electrical failure while it is unattended, causing concentrated chemicals or a mixture of chemicals and water to backflow into the water supply;
2. an irrigation pumping plant shutdown while the injection equipment continues to operate, possibly causing concentrated chemical or a mixture of water and chemical to backflow into the water source, and/or cause an undesirably high concentration of chemicals in the irrigation pipeline; and
3. a chemical injection system shutdown while the irrigation pump continues to operate, possibly causing water to backflow through the chemical supply tank and overflow chemical on the ground.

The American Society of Agricultural Engineers in 1982 issued an Engineering Practice document, "Safety Devices for Chemigation," (ASAE EP409.1). It addressed chemigation in its broadest sense, i.e., injecting any liquid chemical – fertilizer or pesticide – into an irrigation system. The document has been revised or reaffirmed several times, most recently in December 2013.

The U.S. Environmental Protection Agency, in its Pesticide Registration (PR) Notice 87-1, focused solely on pesticide applications. The document, dated March 11, 1987, is directed at pesticide manufacturers whose product(s) are labeled for application by chemigation. The notice requires that container labels of such pesticides include statements listing the safety devices that must be in place for legal application of the product. Approximately two years later, the agency modified its requirements, providing a list of alternative chemigation safety equipment deemed to offer an equivalent level of protection.

Legislation of most states where chemigation is practiced, including Nebraska, requires essentially the same safety devices and equipment mandated by the EPA (through EPA's Label Improvement Program). With a few exceptions, they parallel the American Society of Agricultural and Biological Engineers (ASABE) recommendations. Safety devices and equipment needed in Nebraska are specified in the Nebraska Chemigation Act (Summary in Appendix A) and Title 195 of the Rules and Regulations of the Nebraska Department of Water, Energy, and Environment (NDWEE) [Appendix B]. For the latest changes in Title 195, see <https://go.unl.edu/chemigationtitle195>.

Safety devices and equipment required by the Nebraska Chemigation Act and NDWEE's rules and regulations include are provided below.

1. *Irrigation pipeline check valve.* A check valve must be installed in the irrigation pipeline between the irrigation pump and the point of chemical injection into the irrigation pipeline to prevent water and chemical from draining or siphoning into the water source. NDWEE regulations require that the valve body and all components be constructed of corrosion resistant materials or be coated or treated to prevent corrosion. The check valve must contain a spring-loaded sealing mechanism designed to close prior to or at the moment water stops flowing in the downstream direction. The ASABE adds that direction of flow should be clearly indicated on the outside of the device. It also must pass an Underwriters Laboratory, Inc. test for leakage (Appendix C). The check valve must be able to withstand for one minute a hydrostatic pressure double its rated working pressure without leakage at joints or at the valve seat. It also must be able to withstand for 16 hours an internal hydrostatic pressure equivalent to the head of a column of water five (5) feet high retained within the downstream portion of the valve body. A list of check valves certified by NDWEE as meeting these requirements appears in Appendix D.
 - Where system configuration and terrain are suitable, EPA regulations accept a gooseneck pipe loop downstream from the irrigation water pump as an alternative to having an irrigation pipeline line check valve and low pressure drain. The bottom side of the pipe at the loop apex must be at least 24 inches above the highest sprinkler or other type of water emitter. The loop must contain either a vacuum relief or combination air and vacuum relief valve at the apex of the pipe loop. The pesticide injection port must be located downstream of the apex of the pipe loop and at least 6 inches below the bottom side of the pipe at the loop apex.

In the 1989 revision of its ruling on mandatory chemigation safety equipment, EPA allowed the gooseneck pipe loop as an alternative to having an irrigation pipeline check valve and low pressure drain. NDWEE, however, has not specifically included this alternative in Title 195 of its regulations. Contact your local NRD to ascertain whether this option can be used on your field site.

2. *Vacuum relief valve.* The vacuum relief valve must be located on top of the irrigation pipeline between the irrigation pump and the irrigation pipeline check valve (figure 4) to

prevent a vacuum that could cause siphoning when the water flow stops. NDWEE specifies that the vacuum relief valve should be at least 3/4 inch in diameter. Most systems have vacuum relief valves greater than 2 inches in diameter.

3. *Inspection port.* In most cases, the vacuum relief valve also serves as an inspection port. It is provided to check for malfunction of the irrigation pipeline check valve and low pressure drain. It must be sited between the irrigation pump and the irrigation pipeline check valve so that the inlet to the low-pressure drain can be observed (figure 4). A minimum 4-inch diameter opening is required for the inspection port.
4. *Low pressure drain.* The low-pressure drain must be installed on the bottom of the horizontal pipe between the irrigation pump and the irrigation pipeline check valve. The drain must, in all instances, be located on the irrigation pipeline before the point of chemical injection (chemical injection port). The drain must be constructed of corrosion-resistant material, or coated to prevent corrosion, and must be installed at or below the bottom of the pipe. The drain opening must be at least 3/4 inch in diameter and open automatically when water flow stops. In addition, a hose or conduit 3/4 inch or greater in diameter must be attached to the low pressure drain and the outlet must be at least 20 feet from the irrigation well or water source.
 - ASABE further recommends that the drain have a closing pressure of at least 1 psi, but not exceeding 5 psi. They also recommend grading the soil surface, if necessary, to ensure that drainage is carried at least 20 feet from the irrigation water source. In the event that the mainline check valve leaks slowly, this drain will ensure that the solution will drain away from, rather than toward, the well or other water source.
5. *Chemical injection line check valve.* A check valve must be installed in the chemical injection line between the chemical injection pump and the chemical injection port on the irrigation pipeline. Its purpose is twofold: 1) to prevent gravity flow from the chemical supply tank into the irrigation pipeline, and 2) to prevent irrigation system water from flowing into the chemical supply tank causing an overflow. To help achieve these objectives, it is recommended that the injection port and check valve be placed in the irrigation pipeline *above* the liquid level in the chemical supply tank; an ideal location is in the upright column of the pivot. Nebraska regulations require that the valve be constructed of chemically resistant materials and designed to have a minimum opening (cracking) pressure of 10 psi (69 kPa).
6. *Simultaneous interlock device.* The irrigation pumping plant and the chemical injection pump are to be interlocked so that if the pumping plant stops, the injection pump will also stop

As an alternative to meeting the opening pressure requirement, Nebraska regulations allow a vacuum relief valve to be placed in the chemical injection line between the injection pump and the chemical injection line check valve. The vacuum relief valve must: 1) be constructed of chemically resistant materials; 2) open at atmospheric pressure; 3) be at an elevation greater than the highest part of the chemical supply tank; and 4) be the highest point in the injection line.

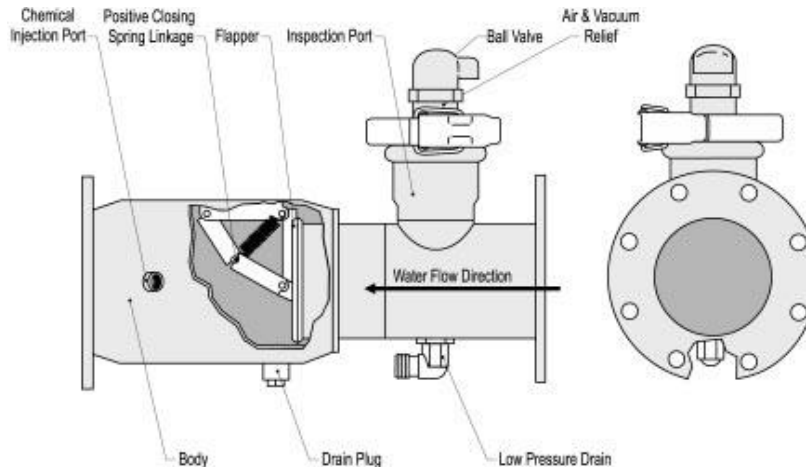


Figure 4. Schematic drawing of typical irrigation pipeline check valve.

Pesticide labels include requirements for a normally closed solenoid valve between the chemical supply tank and the chemical injection device. EPA's List of Alternative Chemigation Safety Equipment (March 22, 1989) approves three alternative devices in lieu of a normally closed solenoid valve:

- *“Functional spring-loaded check valve with a minimum of 10 psi cracking pressure. The valve must prevent irrigation water under operating pressure from entering the pesticide injection line and must prevent leakage from the pesticide supply tank on system shutdown. This valve must be constructed of pesticide-resistant materials. [Note: this single device can substitute for both the solenoid-operated valve and the functional, automatic, quick closing check valve in the pesticide injection line.] **Nebraska’s Chemigation Act requires this check valve.***
 - *“Functional normally closed hydraulically operated check valve. The control line must be connected to the main water line such that the valve opens only when the main water line is adequately pressurized. This valve must prevent leakage from the pesticide supply tank on system shutdown. The valve must be constructed of pesticide-resistant materials.*
 - *“Functional vacuum relief valve located in the pesticide injection line between the positive displacement pesticide injection pump and the check valve. This alternative is appropriate only for those chemigation systems using a positive displacement pesticide injection pump and is not for use with venturi injection systems. This valve must be elevated at least 12 inches above the highest fluid level in the pesticide supply tank and must be the highest point in the injection line. The valve must open at 6 inches water vacuum or less and must be spring loaded or otherwise constructed such that it does not leak on closing. It must prevent leakage from the pesticide supply tank on system shutdown. The valve must be constructed of pesticide-resistant materials.”*
6. *Simultaneous interlock.* Nebraska regulations require the irrigation pumping plant and the chemical injection pump to be interlocked so that if the pumping plant stops, the injection pump also will stop. If the irrigation pump should stop, the interlocking system will prevent chemicals from the supply tank from filling irrigation lines.

On systems with an engine-driven irrigation pump, the chemical injection pump can be belted to the drive shaft or an accessory pulley of the engine. Another alternative includes operating the injection equipment using power generated by the pumping plant power unit. These types of installations are directly interlocked so that the injection device operates only when the irrigation pumping plant is operating.

SAFETY NOTE:

Never operate an irrigation pump from a stationary power plant without a drive shaft shield between the engine and irrigation pump. See ASABE Standard S318.17, *Safety for Agricultural Field Equipment (June, 2009)*, for shielding recommendations.

When the irrigation pump is powered by an electric motor, a separate electric motor usually powers the chemical injection pump. Electric controls for the irrigation pump, irrigation distribution system, and injection pump should be wired so that all three shut down if any one of the three fails.

Some agricultural chemicals have relatively low flash points, making them very flammable. In such cases, wiring must conform to the National Electrical Code requirements specified for hazardous area applications. Check chemical labels for specific requirements.

Additional Safety Measures

As part of their “special use precautions,” some pesticide labels include a requirement for a functional pressure switch in either the irrigation line or the water pump that will stop the water pump motor whenever water pressure decreases to the point that it would adversely affect the pesticide distribution.

Two points are important. 1) It is essential to read all parts of the product label completely before chemigating with a pesticide. 2) Pesticide labels have the force of law; any deviation from label provisions constitutes misuse of a pesticide and subjects the violator to potential prosecution.

The ASABE also recommends that several additional safety measures be implemented:

1. Provide a fresh water source near the chemical supply tank and injection pump for washing off any chemicals that contact the skin. The freshwater outlet from the irrigation system must be located between the irrigation pipeline check valve and the water supply. It should never be used as a port for injecting any agricultural chemical, nor should it be used as a source of drinking water. To minimize potential for skin contact, protective goggles, face shields, and chemical-resistant clothing should be worn when making chemical dilutions. Generally, concentrated chemicals should be added to water in preparing dilutions in a chemical supply tank unless directions specify otherwise.
2. A strainer should be installed between the chemical supply tank and the injection pump to prevent clogging of the injection pump, check valve, or other equipment. The mesh size of the strainer will depend on the type of chemical being injected. For most chemicals, a 50-mesh screen should be used. This device should be inspected before and after each use.
3. Locate all chemical supply and mixing tanks, injection pumps, etc. a safe distance from

potential sources of electric arc or spark to reduce the explosion hazard caused by the flammability of some chemicals.

4. The surface topography in the vicinity of the well or water source should be graded so that any spilled chemical drains away from, rather than toward, the water supply.
5. All equipment and accessories, including hoses, seals, gaskets, etc., that come in contact with chemical mixtures must be resistant to all formulations of agricultural chemicals being applied, including emulsifiers, solvents, and other carriers, in addition to the active ingredient.

The equipment and measures described above will provide, in most cases, an acceptable level of operator safety as well as protect against contamination of the irrigation water source. However, if your irrigation water source is near a municipal well field, additional antipollution protection equipment may be required. In such cases, contact your Natural Resources District or the Nebraska Department of Water, Energy, and Environment. For more center pivot safety reference view the operator's manual from your equipment.

Management

One disadvantage of chemigation, is that it requires management. Anytime a chemical is applied through an irrigation system, several steps must precede as well as follow the application.

Most chemigation-related chemical accidents are the result of careless practices, poor selection of chemigation equipment, or lack of knowledge on how to handle chemicals safely. Time spent taking precautionary safety measures is an investment in the health and safety of yourself, your family, and others, and in protecting the environment. It also helps to ensure that desired results are achieved.

Read and Comply with Product Label

If you plan to apply a pesticide, ***always read the product label*** before starting to chemigate and comply with all directions given. Ensure that:

1. the product label must say that it can be applied by chemigation
2. the label may prohibit certain irrigation systems or require certain nozzles or equipment
3. the crop on which you plan to apply the pesticide is listed on the label;
4. the rate at which the product is applied does not exceed quantities or frequency specified;
5. all items of personal protective clothing and equipment (PPE) specified are used;
6. empty pesticide containers are triple rinsed and recycled or disposed of as directed;
7. restricted entry intervals (REIs) are observed

Equipment Maintenance and Inspection

Some of the most frequent causes of chemical spills in Nebraska have been hose ruptures,

hose clamp failures, and leaking connections – all defects that an adequate pre-operation inspection should detect. To help ensure safe chemigation events, equipment must be maintained properly. All hoses, clamps, and fittings must be in good repair. Nebraska Extension strongly recommends that all chemical injection line hoses and clamps be replaced annually. Inspect them for deterioration before each chemigation operation.

All components that are in contact with chemicals, from the supply tank to the point of injection on the irrigation pipeline, should be constructed of chemically resistant materials.

Every time before chemigating, inspect equipment to be certain that the following items are functioning properly:

- the irrigation system main pipeline check valve and vacuum relief valve;
- the low pressure drain (also check drain hose for proper connection and breakage, and ensure that it drains to the desired location);
- the chemical injection line check valve;
- the irrigation system and pumping plant main control panel and the chemical injection pump safety interlock;
- the injection system, including the in-line strainer;
- the irrigation pump and power source.

Plug First Nozzles on Center Pivots

To facilitate monitoring of the chemigation operation, the main control panel, water pump, chemical supply tank, chemical injection pump, and the area around them must be kept free of chemical contamination. Plugging the nozzle outlets in the immediate area of this equipment will significantly reduce the possibility of inadvertent exposure to chemical contamination. This should also be done while calibrating equipment. It is important to remember that though the nozzles in the area surrounding the equipment are plugged, this does not mean there are not chemical residues from drift, transfer, or previous applications. Take caution while working with this equipment and after. Remove all apparel that may have chemical residues and wash separately from other items.

Personal Protective Clothing and Equipment

Pesticides are products that are toxic (some more so than others). These products also pose some degree of threat to human health. Depending on the relative toxicity of the pesticide and the type of formulation, applicators and handlers normally need some type of personal protective clothing and equipment (PPE). It is always a good idea to wear long sleeves, long pants, and boots that are rubber or rubber over shoes when working with chemicals.

The *relative toxicity* of a pesticide is indicated on the product label by a “signal word.” Those labeled “CAUTION” are the least toxic; those labeled “WARNING” are more toxic; those labeled “DANGER” are the most toxic.

Chemicals can enter the human body by any of three “routes of entry:”

1. through the mouth (orally),
2. absorption through the skin (dermally), or

3. by breathing into the lungs (inhalation).

“*Route of entry statements*,” therefore, appear on the label to indicate actions a user must take to avoid exposure. Here are some examples of these statements: “May be fatal if swallowed. Harmful if absorbed through skin. Avoid breathing vapor or spray mist. Do not get in eyes, on skin, or on clothing.”

Ordinarily the label next lists the specific items of protective clothing, personal protective equipment (PPE), and footwear that must be used. The applicator is legally responsible for using all safety equipment and protective clothing listed. In general, the more toxic the pesticide, the greater the need for protective clothing and/or equipment.

Based on the example statements listed above, the product label would include PPE requirements such as: “Applicators and other handlers must wear: coveralls over short-sleeved shirt and short pants, chemical-resistant gloves such as Barrier Laminate or Viton, chemical-resistant shoes plus socks, protective eyewear, chemical-resistant headgear for overhead exposure, chemical-resistant apron when cleaning equipment and mixing or loading.”

Accidental Spills

Some of the most frequent causes of accidental spills are rupture of a chemical supply tank and injection hose failure. Liquid fertilizer tanks, in particular, are often constructed of molded plastics or fiberglass. “Weathering” of these tanks through exposure to sunlight and temperature extremes over time tends to stress seams where the sections have been joined, and eventually the tank fails.

Hoses can become cracked from weathering and develop leaks from holes because of abrasion. The chemigation pump pulses as it pumps the product causing the hose to vibrate slightly. This movement can wear a hole in the hose if it is placed over a rough surface like the edge of the pivot pad. Always look over the hose placement and put a board or something smooth under it if it is placed over an abrasive surface.

When a spill happens there are several consequences:

- The producer loses several hundred gallons of valuable fertilizer or pesticide.
- The area onto which the product flows becomes contaminated. All contaminated soil must be excavated and disposed of, usually by spreading in an agronomically acceptable manner on nearby crop land.
- The incident must be reported (see details below).
- The spill may represent a threat to groundwater beneath the spill site or nearby surface water sources.

Check tanks and connecting hoses anytime the tank is filled with chemicals for leaks, cracks, and deterioration from age to prevent spills. Replace tanks and hoses as needed to prevent spills and leaks. Secondary containment may be required if tank exceeds 100 gallons for a pesticide and 2,000 gallons for fertilizers. However, ***it is strongly recommended that secondary containment be provided.*** Check with Nebraska Department of Agriculture for more information.

Nebraska Department of Water, Energy, and Environment rules and regulations on secondary containment appear in Title 198 (June, 2020). A summary of those rules is included in this manual as Appendix F.

If a spill occurs, apply the four “C’s:”

- **Control** — plug the hole, return the tank to the upright position, or apply other corrective action(s);
- **Contain** — dike the area with soil or apply absorbents; avoid letting the chemical flow away from the spill site into any surface water source;
- **Contact** — call the NRD and NDWEE immediately; If it is after business hours you may contact state patrol
- **Clean up** — special precautions, such as removing the contaminated soil, may be necessary to prevent groundwater contamination.

Regardless of the size of the spill, 1) avoid getting the chemical on your skin, clothing, or shoes, especially if it is a pesticide; 2) keep people, especially children, away from spills; 3) keep potential spill damage to a minimum.

Under provisions of the Nebraska Chemigation Act, “actual or suspected” accidents, such as spills, are to be reported to the Nebraska Department of Water, Energy, and Environment (402-471- 2186) and the local Natural Resources District within 24 hours of discovery. Accidents that occur after normal working hours (8 a.m.-5 p.m.) are to be reported to the Nebraska State Patrol (402-471-4545). All information available about the accident at the time of discovery must be reported, such as time of occurrence, type and quantity of material, location, and any corrective or cleanup actions that have been or are being taken. Failure to report an accident subjects’ violators to a fine of up to \$5,000, or a Class III misdemeanor.

Monitoring

During any chemical application, periodically monitor the irrigation system and chemical injection equipment to be certain that both are operating properly. Check the wind speed and direction periodically to ensure that wind drift will not transport chemical to a nontarget area.

Avoid Nontarget Application

Groundwater, Surface Water: Certain conditions may preclude chemigating. For example, if there is an uncapped abandoned well, flowing water in a creek channel, or a wetland within the target area, chemigation would not be a legal option. Any person who contaminates groundwater or applies an agricultural chemical to permanent or semi-permanent surface water areas violates state as well as federal law and is subject to prosecution.

End Guns: End gun shutoffs that fail to function and unfavorable weather conditions are among the common sources of nontarget or off-target applications. **The use of end guns during chemigation is *not* recommended.** Ordinarily, end guns operate intermittently. As they turn on and off, the operating pressure of the system may change resulting in a nonuniform chemical application. Variable rate injection pumps can help with a more uniform pressure and application while using end guns.

Spray Drift: Spray from continuous move irrigation systems can be carried considerable distances by wind. Drift can result in violations of the law for misapplication of a pesticide and illegal pesticide residues in or on a crop. It also can damage your own or a neighbor’s nontarget

crops. It may also reduce the efficacy of the application you are making.

Wind variation also can have a detrimental effect on other types of sprinkler systems such as solid set, hand move laterals, side roll laterals, and tow-line laterals. To minimize problems associated with wind drift, these steps can be taken:

- avoid use when winds are strong enough to cause significant drift (10 mph or greater)
- always follow the label
- space the sprinklers and lines more closely together, if possible
- operate at night when winds are relatively calm.

Avoid Causing Runoff or Deep Percolation

The irrigation system should be managed so that runoff or deep percolation (movement of water below the crop root zone that increases the risk for chemical leaching) of the water-chemical mixture does not occur. If runoff does occur within the field, take precautions to prevent runoff from leaving the field when chemical is being applied. With a given sprinkler package on a center pivot, reducing the application depth by making a faster revolution will reduce the potential for runoff and deep percolation. Good irrigation management practices must be used throughout the entire irrigation season to avoid movement of water below the crop root zone and the potential for chemical leaching. Over irrigation of fields that results in water leaving the field through run off is illegal and may result in penalties. Point source pollution of groundwater from leaching is also a serious concern and should be managed for accordingly.



Surface runoff from a field with little crop residue cover

Flush Injection Equipment and Irrigation System

To prevent accumulation of precipitates, flush the injection system for at least 10 minutes with clean water after use. Flush the injection system while the irrigation system is still operating so that the water used for cleaning will be applied to the field where the chemigation application

was made.

After injection is completed, operate the irrigation pump for at least 10 minutes to flush the irrigation system of any chemical. Some systems, especially drip systems, may take longer than 10 minutes to flush completely.

Calibration Procedures

The objective of each chemigation event is to apply the amount of pesticide specified on the product label. The quantity of fertilizer should be determined by the nutrient needs of the field. Accurate calibration of the chemical injection system is critical. You must calibrate to determine whether the amount of chemical applied is too much, too little or, by chance, just right. Over application wastes product and money. If a pesticide is over-applied, the person responsible can be prosecuted for misuse of the pesticide. Under-application frequently does not provide the desired effect and could result in pesticide resistance developing in the pest population. See the chapter on Calibration Workbook for additional information.

Calibrating a chemigation system is not difficult. It requires some time, simple equipment, and accurate calculations. Do not rely solely on data provided by the manufacturer. Manufacturer's suggestions can eliminate the need for much trial and error by serving as a starting point for calibration, but in-field conditions do not necessarily match factory test sites. Nebraska research has proven that injection pumps with the same model number can deliver significantly different chemical injection rates. The same research found that injection rates were significantly impacted by the operating pressure of the irrigation system. Consequently, the only way to be sure that the injection rate is appropriate is to calibrate the injection pump for the current operating conditions.

Equipment Needs

Measuring equipment includes: a stopwatch, a measuring wheel or tape (preferably 100 ft), a pocket calculator, and marking flags or stakes large enough to be seen easily at a distance.

Keep the sprinkler chart available for calibration to refer to the needed measurements. This will reduce the time spent on calibrating the equipment.

Calibration is a procedure to determine the amount of chemical that is applied to a given area during a predetermined amount of time, plus adjusting the pump to achieve that rate. For convenience and *accuracy*, many chemical injection systems are sold with a calibration tube installed. Ordinarily it is a cylinder, graduated in units of volume, installed in the chemical injection system between the chemical supply tank and the chemical injection pump. The calibration tube should be clear, resistant to sunlight and breakage, and hold enough chemical to inject for a minimum of five minutes. If a calibration tube is not equipped on your chemigation pump, another alternative method would be pulling the injection valve out to provide some back pressure to the injection pump. Then pump the solution into a 5-gallon bucket. Once you have reached your elapsed time turn off pump and pour into a graduated cylinder. You then can adjust your pump accordingly.

Though not nearly as accurate as a calibration tube, a pressure relief/regulating valve also can be used for calibration. This valve can be used for "rough" calibrations of pump output by installing it on the end of the injection/metering pump output hose, setting the pressure equal to

the irrigation line pressure at the point of injection and directing the output volume into a measuring container for a specific time period. This method is superior to open discharge pumping into a catch basin because pressure is maintained against the pump.

General Procedures

The injection equipment and safety devices required for applying agricultural chemicals through all types of irrigation systems are similar, as are the calibrating procedures. In general, it is necessary to determine the:

1. wetted area to be treated in acres, (obtain from field map or calculate)
2. total amount of chemical required (in gallons), (Located on pesticide label, fertilizer recommendation)
3. time required to treat the area (in hours), (Sprinkler chart or calculate)
4. chemical injection rate per hour, (calculate)
5. calibration setting on the chemical injection pump. (calibration marking on pump or pump manual)

Specific procedures will be outlined for calibrating center pivot, stationary sprinkler, and drip or trickle systems.

Calibrating a Center Pivot System

The calibration process is based on the given measurements of the irrigation system (length, end gun wetting area, etc.), some common mathematical constants and conversions, and the desired rate of chemical application. The following example illustrates the procedure.

Step 1. Determine the *revolution time required at 100% speed*

Time required to treat the area is the amount of time needed for the pivot to make one complete cycle or revolution. This number can be calculated but is also available on the sprinkler chart associated with sprinkler package.

Travel speed of any moving system, pivot or linear, must be measured accurately. For center pivots, the percent timer setting determines the percent of a minute the last tower moves. So, for a percent timer setting of 20%, the last tower will move for 12 seconds out of each minute ($20\% \times 60$ seconds, or 0.2×60 seconds). When measuring travel speed, the irrigation system should be running “wet” (with water) at the speed and pressure that will be used while chemigating. If the system speed setting is changed or the irrigation pump engine throttle is adjusted, always recalibrate. Avoid determining pivot speed at one percentage setting and mathematically calculating the pivot speeds for other settings, other than to obtain a rough estimate.

Wheel slippage can vary considerably from one percentage setting to another. In addition, travel speed is affected by wheel track depth, so it is a good idea to record travel speed at the beginning, middle and end of the growing season.

Two measurements, **time** and **distance**, are required to calculate the travel speed of the pivot. The measurements can be taken in two methods:

- 1) record the time necessary for the outer pivot tower to travel a premeasured distance

(usually a minimum of 50 ft.), or

- 2) measure the distance traveled by the outer pivot tower in a preselected time (usually a minimum of 10 minutes).

The end result of either method is travel speed in ft/minute. **Note:** *a measurement error of only a few feet or a few minutes can result in a significant error in the calibration process.* If the percentage timer is set at less than 100% when determining pivot speed, take the beginning and end time measurements at the same points in the move/stop cycle of the pivot. Measurements taken over greater distances or for longer times also will improve accuracy. If the terrain is rolling, check rotational speed at several locations in the field and calculate the average value. It also is wise to verify rotational speed several times throughout the season to account for differences in wheel track resistances due to cover, soil compaction and wheel track depth.

The last option, but most accurate one, is to time a full revolution of the center pivot at 100% speed. That will result in the exact number of hours for a full revolution without any calculations procedures.

To determine the treatment time, first find out the system travel speed (TS , ft/min) by monitoring the outer pivot tower. In this example we will use Method 2 described above. Consider that the pivot traveled 20 ft in 10 min. Calculations are presented below.

$$TS = \frac{\text{Distance traveled}}{\text{Time}}$$

$$TS = \frac{20}{10}$$

$$TS = 2 \text{ ft/min}$$

Travel speed, along with distance around the outside wheel track, become the basis for determining the amount of time needed for the pivot to make one complete cycle (revolution). Circumference of the last wheel track and pivot travel speed are the two measurements needed to calculate revolution time. Considering a pivot radius (r , in ft), or distance between pivot point and last wheel track, of 1,250 ft, the circumference of the last wheel track (CWT , in ft) is calculated by the equation below:

$$CWT = 2 \times \pi \times r$$

$$CWT = 2 \times 3.14 \times 1,250$$

$$CWT = 7,850 \text{ ft}$$

The sprinkler package printout will list the system length and distance between the pivot point and each sprinkler and tower position, including the last tower. The length required for this calculation is from the pivot point to the last wheel track. It does not include the overhang. If the original system information is not available, it is a good idea to accurately measure this distance with a wheel or measuring tape once and permanently record it in the control panel.

Revolution time at 100% speed (RT_{100} , in hour) is calculated by dividing the circumference of the last wheel track (CWT , in ft) by the travel speed (TS , in min), as provided below. The factor 60 is to convert minutes to hours.

$$RT_{100} = \frac{CWT}{TS \times 60}$$

$$RT_{100} = \frac{7,850}{6.8 \times 60}$$

$$RT_{100} = 19.2 \text{ hours}$$

It is a good chemigation management practice to record the revolution time of several irrigation events and store the percent timer settings and revolution times in the control panel for reference. Since each revolution includes a hundred or so potential revolution time measurement locations, each revolution provides a very accurate measurement of travel speed.

Step 2. Determine the *wetted area to be treated*

The simplest case is a complete circle without intermittent end guns or corner watering systems. The wetted area (WA , in ac) is the area of the field that receives water from the irrigation system. For this case, the only information needed is the wetted radius (WR , in ft), which is obtained by the distance between the pivot point and the effective throw of end gun, if used. The wetted area can be calculated with the equation below.

$$WA = \frac{\pi \times WR^2}{43,560}$$

$$WA = \frac{3.14 \times 1,300 \times 1,300}{43,560}$$

$$WA = 121.8 \text{ ac}$$

Determining irrigated area is more complex for partial circles, irregularly shaped fields, circles with intermittent end guns and other atypical situations. Methods for determining area in many of these situations are presented in Appendix E.

In most cases, it may be wise to leave the end gun off because the water pattern is easily distorted by wind. In addition, if an end gun shut off fails, an off-target application may result. *Finally, remember that when the end gun is turned off, the wetted area treated is less and, consequently, the amount of chemical applied per acre will change if a constant rate injection pump is used to add chemical to the distribution system.*

Step 3. Determine the *total water pumped*

To calculate the total water pumped by the irrigation system (TWP , in ac-in), multiply the irrigation depth (ID , in) times the wetted area (WA , ac). Keep in mind that it is important to consider the water application efficiency (WAE , in %) of the irrigation system, which in this case we will use 85%. Considering an irrigation depth of 0.75 in with a water application efficiency of 85%, the actual irrigation amount selected on the pivot panels should be 0.88 in. On other words, 0.88 in of water must be pumped to achieve a net irrigation depth of 0.75 in. Once the irrigation depth is defined, then the total water pumped is calculated with the equation below.

$$TWP = \frac{ID}{WAE} \times WA$$

$$TWP = \frac{0.75}{0.85} \times WA$$

$$TWP = 0.88 \text{ (in)} \times WA$$

$$TWP = 0.88 \times 121.8$$

$$TWP = 107.2 \text{ ac} - \text{in}$$

Step 4. Determine the *revolution time required*

This is an important process during the calculation process as the revolution time required (*RTR*, in hour) will allow the determination of the right pivot speed setting that will attend the nutrient application rate selected in the field. Center pivots have, on average, the capacity to cover 1 ac-in/hour under a pumping flow rate (*PFR*, gal/min) of 450 gallons per minute (gpm). If the pump flow rate differs from this number, the amount covered (acre-in per hour) will also change. Considering a pump flow rate of 750 gpm, then this pivot2.13 can cover 1.7 ac-in/hour. To calculate the revolution time required, divide the total water pumped by the pumping capacity, as shown below:

$$RTR = \frac{TWP}{\left(\frac{PFR}{450}\right)}$$

$$RTR = \frac{TWP}{\left(\frac{750}{450}\right)}$$

$$RTR = \frac{TWP}{1.7 \text{ (ac} - \text{in/hour)}}$$

$$RTR = \frac{107.2}{1.7}$$

$$RTR = 63.1 \text{ hours}$$

Step 5. Determine the *total volume of product required*

To calculate the total volume of product (*TVR*, in gal) required for a particular field, simply multiply the volume needed per acre (*VA*, in gal/ac) times the wetted area of the field (*WA*, in ac). Assuming an application of 30 lb. of nitrogen per acre using 28% Urea-Ammonia Nitrate fertilizer (UAN), which is equivalent of a volume needed per acre of 10.1 gallons of 28% UAN solution per acre, the total volume of product applied can be calculated with the equation below.

$$TVR = WA \times VA$$

$$TVR = 121.8 \times 10.1$$

$$TVR = 1,230 \text{ gal}$$

Step 6. Determine the *product injection rate (per hour)*

The injection rate (IR, in gal/hour) is the total volume of product required (*TVR*, in gal) divided by the required revolution time (*RTR*, in hour), as provided with equation below.

$$IR_{gph} = \frac{TVR}{RTR}$$

$$IR_{gph} = \frac{1,230}{63.1}$$

$$IR_{gph} = 19.5 \text{ gal/hour}$$

Step 7. Calibrate the *chemical injection pump*

Knowing the product injection pump capacity in relation to the delivery rate needed can help establish an initial pump setting. To determine an initial (or estimated) product injection pump setting (*EPS*, in %), divide the desired injection rate (*IR*, in gal/hour) by the pump's rated (*PR*, in gal/hour) or maximum capacity. Assuming a chemical injection pump's maximum injection rate of 60 gal/hour, the estimated injection pump settings can be calculated with the equation below.

$$EPS = \frac{IR}{PR} \times 100$$

$$EPS = \frac{19.5}{63.1} \times 100$$

$$EPS = 32.5\%$$

Thus 32.5% is the suggested first setting for the initial calibration attempt. Increase or decrease the injection rate based on the quantity of product pumped from the calibration tube at 1-minute intervals. Because the main goal is to bring the mix from the injection pump to a outside container (for example a bucket) using the calibration tube, we recommend only 1-minute intervals so the volume collected in the container can be easily measured (less than 100 oz). If the calibration tube scale is expressed in milliliters (mL) or ounces (oz), it will be necessary to convert gallons per hour (gal/hour) to that scale. To make this conversion, use the following equations:

$$IR_{mL/min} = IR_{gph} \times 63$$

$$IR_{mL/min} = 19.5 \times 63$$

$$IR_{mL/min} = 1,228.5 \text{ mL/min}$$

$$IR_{oz/min} = IR_{gph} \times 2.133$$

$$IR_{oz/min} = 19.5 \times 2.13$$

$$IR_{oz/min} = 41.5 \text{ oz/min}$$

The application rate expressed in *mL/min* or *oz/min* becomes the injection rate at which the chemical injection pump must be set to achieve the desired chemical treatment. If the number measured at the calibration tube differs from the 1,228.5 mL/min or 41.5 oz/min, then the injection pump setting should be changed, and the calibration tube process should be repeated until the desired injection rate is achieved.

Chemicals vary in viscosity and density. Always make the final calibration with the chemical to be injected and at the operating pressure of the irrigation system. When the desired injection rate has been bracketed, check the final adjustment by continuing to pump from the calibration tube over an extended period - at least 5 minutes.

There are some other points to bear in mind in calibrating a chemical injection pump. First, remember that book output values of chemical injection pumps are normally measured at the factory based on using a specific drive shaft speed. Any variance from the tested shaft speed will alter the pump output. Wear of the chemical injection pump also will alter output. When the chemical injection pump is belt driven from the drive shaft of the engine powering the irrigation pump, a tachometer is helpful.

Calibrating a Stationary Sprinkler System

Solid set, hand lines, and wheel lines are examples of stationary irrigation systems that can be used for applying agricultural chemicals.

An advantage of the stationary system is being able to inject the chemical anytime during the irrigation process. A product may be injected midway through the irrigation process to allow additional water to be applied for incorporation. A foliar product, in contrast, will usually be applied near the end of the irrigation to limit the amount of water that is applied following the insecticide application to reduce wash off.

Below is an example of one way to calibrate a stationary sprinkler system for a fertilizer application.

Step 1. Determine the *wetted area per set*.

To calculate the wetted area of a stationary sprinkler (WA_{ss} , in ac), simply multiply the lateral spacing (LS , in ft) of the main line times the length of the lateral (LL , in ft), as given in the equation below. If more than one lateral is being operated simultaneously, also multiply by

the number of laterals (NL). Assume that each set of the irrigation system has 10 laterals that are 800-foot long and spaced 40 feet apart.

$$WA_{ss} = \frac{LS \times LL \times NL}{43,560}$$

$$WA_{ss} = \frac{40 \times 800 \times 10}{43,560}$$

$$WA_{ss} = 7.3 \text{ ac}$$

Step 2. Determine the *total volume of product required*

To calculate the total volume of product (TVR , in gal) required for a particular field, simply multiply the volume needed per acre (VA , in gal/ac) times the wetted area of the field (WA_{ss} , in ac). Assuming a volume needed per acre of 12 gallons of 28% UAN solution per acre, the total volume of product applied can be calculated with the equation below.

$$TVR = WA_{ss} \times VA$$

$$TVR = 7.3 \times 12$$

$$TVR = 87.6 \text{ gal}$$

Step 3. Determine the *rate of water application by the irrigation system*

Attach a short piece of hose to the nozzle outlet(s) of one sprinkler, start the irrigation system, and measure flow for 1 minute. Repeat this procedure at several sprinklers along the lateral and determine the average sprinkler flow rate. Given the sprinkler flow rate in gallons per minute and the spacing between sprinklers and spacing between sprinkler laterals, the water application rate (WAR , in in/hour) can be determined from application rate tables or with the following equation. Assuming a flow rate from each sprinkler (q_s , in gal/min) of 4 gal/min, a spacing between sprinklers on lateral (S_l , in ft) of 40 ft, and a spacing between laterals on mainline (S_m , ft) of 40 ft, the water application rate can be calculated with the equation below.

$$WAR = \frac{96.3 \times q_s}{S_l \times S_m}$$

$$WAR = \frac{96.3 \times 4}{40 \times 40}$$

$$WAR = 0.24 \text{ in/hour}$$

Water application rate also can be determined from the sprinkler manufacturer's application rate table. This method requires knowing the size of the sprinkler nozzles (usually stamped on the nozzle) and discharge pressure, then using these data to enter the application rate table. Adjust the irrigation time to apply the amount of water necessary for proper chemical application.

Step 4. Determine the *time required for irrigation water application*

This step will define the amount of time required (TR , in hours) in which the irrigation system will kept on considering based on a desired irrigation depth (ID , in inches). On this example, we will use 1.0 in of irrigation depth with a water application efficiency (WAE , in %) of 80%. This allows increasing the irrigation amount to compensate for the water application efficiency. The time required to apply the desired irrigation depth can be calculated with the equation below.

$$TR = \frac{\frac{ID}{WAE}}{WAR}$$

$$TR = \frac{\frac{1.0}{0.8}}{WAR}$$

$$TR = \frac{1.25 \text{ in}}{WAR}$$

$$TR = \frac{1.25}{0.24}$$

$$TR = 5.2 \text{ hours}$$

Note: it will be required 5.2 hours to apply an average desired irrigation depth of 1.0 in.

Step 5. Determine the *product injection rate*

The product injection rate (IR_{gph} , in gal/hour) is determined by dividing the total volume of product required (TVR , in gal) by the time required (TR , in hour) to apply the decided irrigation amount, as presented in the equation below.

$$IR_{gph} = \frac{TVR}{TR}$$

$$IR_{gph} = \frac{87.6}{5.2}$$

$$IR_{gph} = 16.85 \text{ gal/hour}$$

Usually, instead of applying the product during the entire time, it can be applied for the last 1-3 hours at the remaining time. Assuming that the operator wants to apply the product within the last 2.5 hours of the irrigation event, therefore the product injection rate can be calculated with the equation below.

$$IR_{gph} = \frac{TVR}{TR}$$

$$IR_{gph} = \frac{87.6}{2.5}$$

$$IR_{gph} = 35 \text{ gal/hour}$$

Note: this procedure will increase the injection rate flow as the amount of water desired to apply the product decreases.

Step 6. Calibrate the *delivery rate of the injection pump to make certain the rate is correct.*

If chemical solution is to be applied throughout or during the last part of the irrigation, allow the irrigation system to operate long enough after the injection to completely flush the chemical from the system. The time required will normally be a minimum of 10 minutes and may be as long as 15 to 20 minutes.

Calibrating a Surface or Sub Surface Drip Irrigation System

To calculate the amount of chemical to apply per acre through a drip system, the lateral movement of water from the emitter must be measured. Because the pattern of water movement is often irregular, it is difficult to calculate the area irrigated.

A more workable method is to apply solutions of a known chemical concentration for a definite period of time. The amount of chemical in solution is expressed in parts per million (ppm) which is the number of molecules of the chemical present in a million molecules. For this example we will use a 170 ppm 28% UAN solution. Injection will occur for 6 hours. Based on the system design, each set or zone of the field will contain several acres.

Step 1. Determine the *gallons of water being delivered per hour per acre by the drip system.*

Collect the water from 10 randomly selected emitters for a given period – use minutes as time here. If a short time period is used, water volume measurements must be very accurate made since the amount of water will be small. This means that if water is collected for ten minutes from one emitter, then all 10 should have water collected for ten minutes. To calculate the system flow rate (*SFR*, in gal/hour/ac), simply multiply the average flow rate per emitter (*AFR_{em}*, in oz/min) times number of emitters per acre (*NEA*). For subsurface drip irrigation systems, use manufacturer's published flow rates or use a flow meter to record the water flow rate over a larger area. Assuming an average emitter flow rate of *0.6 oz/min* for 10 emitters and 8,712 emitters per acre, the system flow rate can be calculated with the equation below.

$$SFR = AFR_{em} \times \frac{60}{128} \times NEA$$

$$SFR = 0.6 \times \frac{60}{128} \times 8,712$$

$$SFR = 2,440 \text{ gal/hour/ac}$$

Step 2. Determine the *total weight of water applied*

This step is important converting the system flow rate (*SFR*, in gal/hour/ac) into the total water weight (*TWW*, lb./ac) based on the injection time (*IT*, in hour). Considering that each gallon of water weighs 8.33 lb. and an injection time of 6 hours, the total water weight can be calculated with the equation below.

$$TWW = SFR \times 8.33 \times IT$$

$$TWW = 2,440 \times 8.33 \times 6$$

$$TWW = 121,951 \text{ lb./ac}$$

Step 3. Determine the *total amount of product (nitrogen) required*

Because we are using solution concentration based on part per million, the calculation process is different. Considering that a 170-ppm product concentration (*PC*, in ppm) contains 170 lb. of product per 1,000,000 lb. of water, calculate the total amount of product required (*TAR*, lb./ac) by multiplying the product concentration by the total weight of water (*TWW*, lb./ac), as presented in the equation below.

$$TAR = \frac{PC \times TWW}{1,000,000}$$

$$TAR = \frac{170 \times 121,951}{1,000,000}$$

$$TAR = 20.7 \text{ lb./ac}$$

Step 4. Determine the *total volume of product (nitrogen) required*

Assuming that 28% UAN solution contains 2.98 lb. of nitrogen/gal, the total volume of 28% UAN solution (*TVR*, gal/ac) required is calculated with the equation below.

$$TVR = \frac{TAR}{2.98}$$

$$TVR = \frac{20.7}{2.98}$$

$$TVR = 7.0 \text{ gal/ac}$$

Multiply the 28% UAN solution application rate per acre by the number of acres treated to get the total UAN solution needed. Add 7.0 gallons of 28% UAN solution to the solution tank for each acre to be irrigated.

Step 5. Determine the *injection rate*

To calculate the injection rate (IR_{gph} , in gal/hour), simply divide the volume of product required (TVR , gal/ac) times the injection time (IT , in hour), as provided in the equation below.

$$IR_{gph} = \frac{TVR}{IT}$$

$$TVR = \frac{7.0}{6}$$

$$TVR = 1.2 \text{ gal/hour/ac}$$

Calibrate the delivery rate of the chemical injection pump to make certain the rate is correct. If the fertilizer will move rapidly in the soil, it is desirable to inject it during the last portion of the irrigation event. If the fertilizer does not move readily in the soil, it can be injected earlier.

If the application occurs at the end of the total irrigation time, operate the irrigation system long enough after the injection is done to completely flush the fertilizer from the system. The time required will depend on the length of drip lines and the size of the delivery pipelines.

Laws and Regulations

Federal and state laws and regulations, and some local regulations affect the practice of chemigation. Laws, regulations, court decisions, and administrative rulings relating to agricultural chemical use and chemigation change frequently. Accordingly, they will be discussed here only in general terms.

Federal Laws and Regulations

Federal Insecticide, Fungicide and Rodenticide Act

All pesticide applications, including those made through an irrigation system, are subject to the provisions of the Federal Insecticide, Fungicide and Rodenticide Act (FIFRA) as amended. FIFRA provisions that will affect a chemigator include requirements to:

1. use pesticides only as directed by the label;
2. be a certified pesticide applicator or be supervised by a certified applicator if you plan to purchase or apply any pesticide classified as a restricted use pesticide (RUP).

A pesticide label (the document affixed to the pesticide container), along with any supplemental labeling that may be provided as a separate document or online, has the same force as federal law. A person who uses any pesticide in a manner inconsistent with its label provisions violates FIFRA and is subject to possible legal action. Therefore, before buying or using a pesticide it is important to first read the product label and fully understand its contents. This is especially true for pesticides to be used in chemigation.

Note: *Pesticide applicator training and certification and chemigation training and certification are totally separate requirements. Being a certified pesticide applicator does NOT exempt a producer who plans to chemigate from completing required chemigation training and certification. Similarly, being a certified chemigator does not exempt a producer who plans to use RUPs from having to complete a pesticide applicator training program.*

The Office of Pesticide Programs of the U.S. Environmental Protection Agency (EPA) has outlined a number of requirements for labeling pesticides intended for use in irrigation systems. Such pesticides must be clearly labeled stating that this method of application is acceptable. Product containers must bear several “generic” warning statements along with a listing of safety devices that must be installed and functioning before the product can legally be applied. The requirements vary depending upon water source as well as type of irrigation system. The EPA developed a list of chemical safety equipment that must be in place for legal application of a product through chemigation (Table 1).” EPA requirements parallel those outlined in the section titled “Chemigation Equipment and Safety Devices”.

Like any other pesticide application, the site (crop) on which the pesticide is to be applied must appear on the label. It is a violation of FIFRA to use a pesticide if the crop is not listed on the label. A pesticide may be applied against any pest occurring on any crop or site specified on the label unless use of the pesticide is limited only to those pests specified on the labeling.

Applying more pesticide than the label specifies also violates FIFRA. Thus, you must calibrate equipment to ensure that the proper rate is being applied. (See “Calibration Procedures.”) It is permissible, however, to apply a pesticide at any dosage, concentration, or frequency less than that specified on the label without exceeding annual per acre application rates. Because of possible ineffective pest control, chemical manufacturers do not warranty applications at rates lower than those specified on the label.

Clean Water Act

The objective of the Clean Water Act (CWA) is to restore and maintain the chemical, physical, and biological integrity of the nation’s waters. By definition, these include essentially all forms of surface water – streams, rivers, lakes, ponds, wetlands. The long-term objective is to eliminate all discharges of pollutants from all sources into these waters.

Agriculture has long been identified by EPA as a leading generator of nonpoint source pollution. Numerous studies conducted by the U.S. Geological Survey and others have noted both nutrient and pesticide loading of many rivers and streams in the Midwest. Nutrient loading

in the Mississippi River and its tributaries has resulted in a hypoxia (low dissolved oxygen) area in the Gulf of Mexico. Sometimes called the Dead Zone. The EPA has been working on a new water quality emphasis aimed at reducing the transport of sediment and agrichemicals from cropland into the surface waters of the US.

Federal Safe Drinking Water Act

There may be cases in which an irrigation well is situated close to a municipal water well. Any backflow of water and/or chemicals that enters an aquifer which is, or could be, used as a public drinking water source is a violation of the federal Safe Drinking Water Act (SDWA).

Under the provisions of the SDWA, each state is required to prepare and implement an approved Wellhead Protection Program. Nebraska's program is administered by the NDWEE. For details on the program, contact NDWEE.

EPA issued a final list of unregulated contaminants in 1998 known or anticipated to occur in public drinking water supplies. The list is used by EPA as it weighs various regulatory options aimed at preserving drinking water quality. Over 30 pesticides or pesticide degradates are on the list.

In its 1996 amendments to the SDWA, Congress directed EPA to establish a national occurrence database of both regulated and unregulated contaminants. Every five years EPA must establish a list of unregulated contaminants to be monitored. The agency issued a final rule in September 1999 with revisions to the "Unregulated Contaminant Monitoring Regulation for Public Water Systems." The contaminant list in the final rule includes several pesticides.


Reporting and Signs

Once the decision has been made to chemigate the operator must be prepared to report an incident if one occurs and also use signage if the product requires it. Products that require signs will have it indicated on the label under the section labeled "Directions for use" Which may be under the heading "Agricultural Use Requirements". Signs must contain the words "KEEP OUT, CHEMICAL APPLICATION THROUGH IRRIGATION SYSTEM". The sign must be present until after the time period indicated by the re-entry interval. For more information on signs please see chapter 12 of the Nebraska Chemigation Act Title 195 in Appendix B. Reporting accidents is another important responsibility of applicators. Accidents happen and the goal of reporting is to prevent additional damage from occurring. The local Natural Resource Department and the NDWEE should be notified if an accident occurs. See Title 195 in Appendix B for more information regarding the reporting of accidents.

Nebraska's Nitrate Challenge

Nitrogen is an essential element for plant growth and therefore, Nebraska's agricultural industry. However, when nitrogen leaves the crop root zone it becomes a liability for groundwater, surface water, and air quality. For more than 40 years, levels of nitrate in Nebraska's groundwater have been increasing, with many townships now above 10 ppm safe drinking water standard. In 2017, 349 towns and cities in Nebraska, serving 1.4 million people (about three-quarters of the state's population), had nitrate levels above 10 ppm. The primary

source of nitrate in Nebraska is commercial fertilizers and is most evident in areas beneath irrigated corn fields, on sandy soils, with shallow depth to groundwater. Currently 26-35% of applied nitrogen to corn is still lost to the environment in Nebraska. This loss is related to management practices, hydrogeology, and climate.

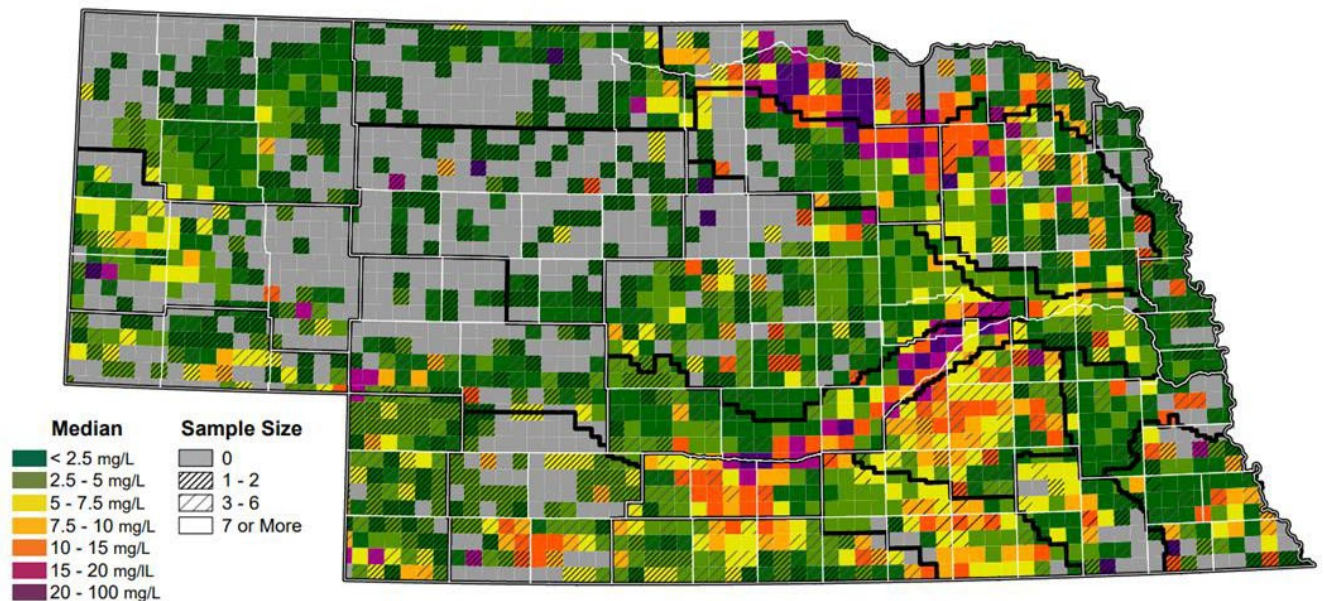

Groundwater Nitrate, township median. NDEE 2020.

Drinking Water Nitrate is a Lifetime Health Risk

In 1992, Nitrate became a regulated compound under the Federal Clean Drinking Water Act. A maximum safe level of 10 ppm was established based on studies of methemoglobinemia (blue baby syndrome). A growing body of recent research is also showing connection with drinking water nitrate and increased lifetime risk for cancers, particularly colorectal and pediatric, thyroid disease, and adverse reproductive outcomes, even at levels below 10ppm.

Nitrate is a Rural Vitality Liability

Fertilizer lost as nitrate is both an economic loss to the farmer and a loss to the community. 80% of Nebraskans rely on groundwater for drinking water and nearly 100% of rural residents utilize domestic (private) drinking water wells. For small communities of less than 500, the cost of nitrate treatment in Nebraska ranges from \$90 to \$650 per person annually. Treating the water at the tap (point of use) costs between \$50 and \$250 per person annually. The impacts of these factors can become a liability to local and regional growth. If current trends continue, Nebraska is facing tens of millions of dollars in investment in water filtration infrastructure in the coming decades.

Implementing Practices for Better Water Quality Today and in the Future Producers and partner organizations in Nebraska have been implementing practices since the 1980s to reduce these high nitrate concentrations in water. Technology and management changes have led to systems with improved irrigation and nitrogen use efficiency. In some shallow groundwater

systems, such as the Central Platte NRD, nitrate concentrations have slightly decreased. Unfortunately, scale and scope of these practices have not met the challenge facing the state.

To see full list of more information and full references:
<http://www.water.unl.edu/category/nitrate>

Equipment Requirements for Chemigation with Pesticides

PR Notice 87-1

TABLE 1. List of equipment requirements when injecting pesticides.

Sprinkler Chemigation	System Connected to Public Water Supply*	Flood (basin), Furrow, and Border Chemigation
<ol style="list-style-type: none"> 1. Check valve, vacuum relief valve, low pressure drain 2. Automatic, quick-closing check valve in pesticide injection pipeline 3. Interlocking controls between pesticide injection pump, and water pump 4. Pressure switch to stop pump motor when water pressure drops 	<ol style="list-style-type: none"> 1. Reduced-pressure-zone backflow preventer (RPZ) or equivalent in water supply line upstream from the point of pesticide introduction <li style="text-align: center;">Or Water from public water system discharged into a reservoir prior to pesticide introduction with complete physical break between the fill pipe outlet and the overflow rim of the reservoir at least twice the inside diameter of full pipeline 2. Automatic, quick-closing check valve in the pesticide injection pipeline 3. Normally closed solenoid-operated valve on the intake side of the pesticide injection pump 4. Interlocking controls between the pesticide injection pump and the water pump 5. Metering pump, such as a positive displacement injection pump (e.g. diaphragm pump) design, constructed of materials compatible with pesticides, and capable of being fitted with the system interlock 	<p>Same requirements as “Sprinkler Chemigation” with the addition of:</p> <p>Metering pump, such as a positive displacement injection pump (e.g., diaphragm pump) design, constructed of materials compatible with pesticides, and capable of being fitted with system interlock</p>

**A system providing piped water for human consumption that has at least 15 connections or regularly serves an average of at least 25 individuals daily at least 60 days out of the year.*

Federal Endangered Species Act

This law is intended to protect endangered and threatened species. Under terms of the law, the EPA is required to work with the U.S. Department of Agriculture and Department of the Interior to protect endangered species from pesticides while allowing agricultural production to continue. One of EPA's actions was to ask the U.S. Fish and Wildlife Service to revise and expand biological opinions on the effects of selected pesticides on both aquatic and terrestrial species.

Based on the FWS report, EPA implemented the Endangered Species Protection Program. EPA's program uses generic labeling of affected products directing users to follow use limitations found in county bulletins issued for any area that is habitat for, or is used by, an endangered or threatened species. Bulletins have been issued for 32 counties in Nebraska. The bulletins contain maps and habitat descriptions of the listed species, and affected pesticides are identified with directions for use.

EPA maintains a toll-free Endangered Species Hotline (800-447-3813) that pesticide users can contact to obtain a county map. Information is available online through Bulletins Live!2 at <https://www.epa.gov/endangered-species/endangered-species-protection-bulletins>. The maps also can be obtained through the U.S. Fish and Wildlife Service, Nebraska Department of Agriculture, and Nebraska Game and Parks Commission.

Resource Conservation and Recovery Act

Bulk storage and disposal of pesticides or pesticide-contaminated materials, such as containers and rinsate, is subject, under some conditions, to the requirements of the Resource Conservation and Recovery Act. EPA or state permits may be required for bulk chemical storage. Be sure to follow label directions carefully in disposing of such materials. Chemical spills may be treated as improper or unauthorized disposal of hazardous materials. Be sure to notify state environmental officials immediately if a spill occurs and follow their instructions regarding spill containment and cleanup. Those responsible for spills will be liable for containment and cleanup costs under RCRA; the Comprehensive Environmental Remediation, Compensation, and Liability Act (CERCLA or Superfund) law, or both.

Chemical storage above certain threshold quantities is subject to the Emergency Planning and Community Right to Know Act. Designated state and local emergency response officials must be notified, and facility emergency response plans must be developed.

Hazardous Materials Transportation Act (HMTA)

The federal Department of Transportation (DOT) regulates hazardous materials transport under the HMTA. Many pesticides have been designated by DOT as hazardous materials and are subject to DOT transportation regulations. In general, producers transporting hazardous materials intrastate on local roads between fields of the same farm are exempt from these regulations. However, travel on a federal highway and interstate

travel is regulated. Most pesticide manufacturers and distributors provide the information needed to follow HMTA regulations. Detailed information on hazardous materials transport is available through DOT's Research and Special Programs Administration, 800-467-4922.

Food, Agriculture, Conservation and Trade Act

Persons who apply restricted use pesticides are required to keep records of every RUP application. The recordkeeping requirements are part of the Food, Agriculture, Conservation and Trade Act of 1991, also known as the 1990 Farm Bill. While federal regulations require that records be kept only two years, the Nebraska Pesticide Act requires that private applicators keep records of the following for 3 years:

1. Brand or product name and EPA registration number of the pesticide applied
2. The total amount of pesticide applied
3. Location of the application, area treated and the crop, commodity, stored product, or site that the pesticide was applied. Location can be specified using:
 - the county, range, township, and section
 - an accurate map or written description
 - an identification system approved by the USDA Farm Services Agency
 - the legal property description
4. Month, day, and year of application
5. Name and certification number of the certified applicator who made or supervised the application

Whenever a pesticide is applied through a sprinkler irrigation system, it is recommended that detailed records be kept of the application. In addition to the information specified in the federal standards, it is strongly recommended that wind speed and direction as well as ambient air temperature be recorded at the start of the application and at 4–6-hour intervals throughout the application. While these records are not required by law, having them available will be invaluable in the event of drift damage claims.

Nebraska Laws and Regulations

Chemigation in Nebraska also is subject to provisions of the Nebraska Chemigation Act. The act is available on-line at: <https://go.unl.edu/chemigationact> For user convenience, a two-page summary of the act is included in this manual as Appendix A. Printed copies of the entire law are available upon request from the NDWEE, the agency responsible for implementing and administering that law.

The department's rules and regulations on chemigation (Title 195) are available at: <https://go.unl.edu/chemigationtitle195> Printed copies are available upon request from NDWEE. For convenience, a copy of the rules and regulations is included as Appendix B.

Applications of livestock waste through an irrigation system are governed by Title 130 of NDWEE's rules and regulations. For convenience, a copy of that chapter, current when this manual was printed, is included as Appendix G.

Under provisions of the Nebraska Chemigation Act, Natural Resources Districts (NRDs) are responsible for inspecting each irrigation system through which any agricultural chemical will be applied. The purpose of the inspection is to ensure that mandatory safety devices are installed and functioning.

NRDs have rule-making authority. Because of local concerns about groundwater quality, some districts have adopted restrictions on the amount and timing of fertilizer applications. Persons planning to apply nutrients through an irrigation system should first check with the appropriate NRD and must comply with all applicable regulations. A directory of the NRDs, current when the manual was printed, appears as Appendix H.

Some communities may regulate the use or storage of agricultural chemicals within designated wellhead protection areas, or through traditional community zoning. Check with local zoning officials regarding local requirements.

References

- ¹ Threadgill, E. Dale. 1985. Introduction to Chemigation: History, Development, and Current Status. In Proceedings of the Chemigation Safety Conference. University of Nebraska Center for Continuing Education. Lincoln, NE.
- ² Byers, Mathew E., et al. "Drift during Center-Pivot Chemigation of Chlorpyrifos with and without Crop Oil." Bulletin of Environmental Contamination and Toxicology (1993) 51: 60-67.
- ³ Lamm, F.R., 1998. In-Canopy Sprinkler Application for Corn: What Works and What Doesn't Work. Proceedings of the Central Plains Irrigation Short Course and Exposition. North Platte, NE pp. 70-73.
- ⁴ Yonts, C. Dean, Norman L. Klocke, William L. Kranz, Derrel L. Martin, and Kelly Wertz. 2007. Application Uniformity of In-Canopy Sprinklers. G1712. University of Nebraska Cooperative Extension.
- ⁵ ASAE EP409.1, *Safety Devices for Chemigation*, St. Joseph, MI, American Society of Agricultural Engineers, December 1999.

APPENDIX A

Summary

Nebraska Chemigation Act

This summary provides a brief review of the requirements of the Nebraska Chemigation Act and the Rules and Regulations of the Nebraska Department of Water, Energy, and Environment. Refer to the complete text of the Act and Rules and Regulations for the complete and exact language. For interpretation of the Act or Rules and Regulations with respect to specific situations you will need to consult with the NDWEE or private legal counsel. *Italics are used to indicate key or important points.*

1. Definitions:

Accident- the release of a chemical by spill, leak, faulty or damaged equipment, or similar instance, onto land or into water of the state in a quantity greater than permitted by the product label.

Applicator — any person engaged in the application of chemicals by means of chemigation. Includes any person operating equipment used for chemigation whether for himself or herself or on behalf of the permit holder for the land on which the chemigation will take place.

Chemical — *any fertilizer, fungicide, herbicide, or pesticide mixed with the water supply.*

Chemigation — any process whereby chemicals are applied to land or crops in or with water through an on farm irrigation distribution system.

Elector-Any irrigation district or proposed irrigation district not described in subdivision (1)(a)(ii) of this section, any resident of the state of nebraska who: Owns no less than fifteen acres of land within any such district, is an entryman of government land within any such district, or

Injection location — *each site* where chemicals will be applied through an irrigation distribution system.

Irrigation distribution system — any device or combination of devices having a hose, pipe, or other conduit, which connects directly to any source of groundwater or surface water, through which water or a mixture of water and chemicals is drawn and applied for agricultural or horticultural purposes.

Open discharge system — a system in which the water is pumped or diverted directly into a ditch or canal in such a manner that the force of gravity at the point of discharge into the ditch or canal cannot cause water to flow back to the point from which the water was pumped or diverted.

Permit holder — the owner or operator of land who applies or authorizes the application of chemicals to such land by means of chemigation. Party primarily responsible for any liability arising from chemigation on the property.

Pesticide — any substance intended for preventing, destroying, repelling or mitigating any pest (insect, rodent, nematode, fungus, weed, or other form of plant or animal life or virus, except viruses on or in living humans or animals), and any substance or mixture of substances intended for use as a plant regulator, defoliant, or desiccant.

Restricted use pesticide — a pesticide classified for restricted use by the Federal Insecticide, Fungicide and Rodenticide Act, because of heightened risk to people or the environment.

2. After January 1, 1987, a chemigation permit is required for each chemigation injection location. **No permit is required for open discharge systems.** Permit applications are made to the NRD where the injection location is located. NRD reviews applications, conducts inspections, and approves or denies application within 45 days. The initial permit application fee is established by each NRD.
3. NRD must be notified within 10 days of any change of information on the permit application.
4. An emergency permit for 45 days can be obtained within 48 hours if equipment requirements are met and the applicator is certified. The emergency permit application fee is established by each NRD.
5. Permits expire on June 1 of the year following the year of issue and must be renewed before expiration. A list of chemical names and estimated amounts of all chemicals used in the chemigation system is required for renewal. The renewal permit fee is established by each NRD.
6. *NRD must be notified within 72 hours of any replacement or alterations of approved chemigation equipment.*
7. NRD shall conduct area-wide, selective, and periodic inspections to ensure compliance.
8. Permits will not be issued or renewed if:
 - a. required information is not provided, or
 - b. irrigation distribution system does not comply with equipment standards, or
 - c. applicator is not certified, or
 - d. fee is not paid.
9. NRD shall deny, suspend, refuse renewal of, or revoke permit applied for or issued if fraud or deceit was used to obtain a permit, or if any provisions of the Act, Standards, or Rules and Regulations are violated.
10. Written 10-day notice is required before chemigation permit denial, refusing renewal, suspension or revocation of permit. A hearing can be requested.
11. NRD or NDWEE can order immediate suspension of chemigation if there is an actual or imminent threat of danger to persons or the environment.
12. Equipment required:
 - a. check and vacuum relief valves in the irrigation pipeline
 - b. inspection port to check operation of irrigation pipeline check valve
 - c. automatic low-pressure drain
 - d. chemical injection line check valve
 - e. simultaneous interlock between the power system of the chemical injection unit and the

irrigation pumping plant.

13. See Chapters 9 and 10 of the NDWEE Chemigation Rules and Regulations for specific equipment requirements and standards.
14. Applicators must be certified by attending a training session and passing a written examination. Each applicator's certificate expires four years after the date of issuance and must be renewed by attending a training session and passing a written examination.
15. Posting is required when chemigation is used to apply restricted use pesticides (RUPs) or chemicals that have a label that requires posting. Chapter 12 of Rules and Regulations provides posting details.
16. Actual or suspected accidents related to chemigation must be reported within 24 hours of discovery. The permit holder must carry out a cleanup and recovery plan developed by NDWEE.
17. Compliance with the Nebraska Chemigation Act shall be an affirmative defense to any civil action resulting from a person's use of chemigation.
18. After notification of violation, the applicator has ten days to comply with Act or Rules and Regulations after notification of violation. NRD or NDWEE can revoke permit if there is not satisfactory compliance.
19. NRD or NDWEE may apply for a restraining order, temporary or permanent injunction, or mandatory injunction against violators.
20. A compliance schedule can be established in lieu of the 10-day compliance requirement.
21. Penalties

<u>Violation</u>	<u>Penalty</u>
<i>Emergency Permit Violation</i>	Permit revocation without hearing, Class II misdemeanor
<i>Operating without required equipment</i>	Civil penalty of not more than \$5,000 per day or Class IV misdemeanor
<i>Operating with no permit or revoked permit</i>	Civil penalty of not more than \$5,000 per day or Class II misdemeanor
<i>Operating with suspended permit</i>	Civil penalty of not more than \$5,000 per day or Class II misdemeanor
<i>Tampering or damaging equipment</i>	Civil penalty of not more than \$5,000 per day or Class I misdemeanor
<i>Failure to report an accident</i>	Civil penalty of not more than \$5,000 per day or Class III misdemeanor
<i>Any other violation</i>	Civil penalty of not more than \$5,000 per day or Class IV misdemeanor

23. NDWEE can assume NRD responsibilities, after a hearing, if NRD is not carrying out requirements of the Act.

24. NDWEE or NRD orders can be applied to the District Court.

APPENDIX B

NEBRASKA DEPARTMENT OF WATER, ENERGY, AND ENVIRONMENT

TITLE 195 – CHEMIGATION REGULATIONS

TABLE OF CONTENTS

<u>Code Section</u>	<u>Subject or Title</u>	<u>Enabling Legislation</u> <u>Neb. Rev. Stat.</u>
Chapter 1	Permits, Applications, Certification, Duties of Permitholder	§§ 46-1120, 46-1136
Chapter 2	District Responsibilities	§ 46-1136
Chapter 3	Equipment; Standards, Installation, Maintenance	§§ 46-1117, 46-1121(2), 46- 1126(2), 46- 1138
Appendix I	Leakage Test	

NEBRASKA ADMINISTRATIVE CODE Title 195 – CHEMIGATION
REGULATIONS

Chapter 1 - PERMITS, APPLICATIONS, CERTIFICATION, DUTIES OF
PERMITHOLDER

01 Definitions.

- 01.01 Relevant definitions are located in Neb. Rev. Stat. §§ 46-1104 through 46-1116.01.
- 01.02 Restricted use pesticide is defined in Neb. Rev. Stat. §2-2624(38) of the Pesticide Act.
- 01.03 Accident means the release of a chemical by spill, leak, faulty or damaged equipment, or similar instance, onto land or into waters of the state in a quantity greater than permitted by the product label.

02 Applications. In addition to the requirements of Neb. Rev. Stat. § 46-1120, the following information is to be included with any initial or renewal application for a permit required by Neb. Rev. Stat. §§46-1117 and 46-1119.

- 02.01 Telephone number of applicant.
- 02.02 Calendar year for which application is being made.
- 02.03 Whether the application is for an initial, renewal or emergency permit.
- 02.04 The name(s) of the certified chemigation applicator(s), their certification number and the expiration date of their certification.
- 02.05 Whether the chemical injection equipment to be used is stationary or portable.
- 02.06 Signature of the permit applicant and date of signing. The signature must be that of the proposed permit holder or a person holding power of attorney from the applicant.
- 02.07 If the application is for a renewal permit, the applicant is to list the names and estimated amounts of all the chemicals that were used in the chemigation system the previous year.

03 Transferability. Permits are not transferrable.

04 Subsurface System. A person is hereby authorized by rule to inject chemicals for maintenance of a subsurface drip irrigation system once each calendar year, provided:

- 04.01 The system is equipped with an irrigation pipeline check valve; and
- 04.02 The system is authorized under Title 122 – Rules and Regulations for

Underground Injection and Mineral Production Wells: and.

04.03 Any chemical that is injected is done so in accordance with label restrictions.

05 Posting. Signs must be posted on chemigated fields when a restricted use pesticide or a chemical for which the label requires posting is used. The signs are to meet the following requirements:

05.01 Posted at each usual point of entry into a treated area and at the point of chemical injection if located outside the treated area. Each sign is to be posted in such a manner that it is clearly visible and legible.

05.02 Contain the words "KEEP OUT, CHEMICAL APPLICATION THROUGH IRRIGATION SYSTEM".

05.03 The lettering clearly contrasts with the background and the letters are two and one-half inches in height.

05.04 Posted and maintained during the chemigation period and until the end of reentry period as specified by the chemical label. The sign will be posted no sooner than 48 hours prior to the start of chemigation and be removed, covered, or otherwise made illegible, no later than 48 hours after the end of reentry period.

06 Accident Reporting. Notification of a suspected or actual accident will be made by telephone to the Department and the appropriate district during office hours, from 8 a.m. to 5 p.m., Monday through Friday. After hours and holidays, reports will be made to the Nebraska State Patrol. All information known about the accident at the time of discovery is to be included, such as time of occurrence, quantity and type of material, location, and any corrective or cleanup actions presently being taken.

06.01 The applicator or permitholder will supply any additional information requested in the course of the investigation regarding the amount and type of substance(s) involved, the well and equipment involved, and information the applicator or permitholder would reasonably be expected to know.

07 Investigation and Remediation. The procedures outlined in Title 118, - Ground Water Quality Standards and Use Classification, Appendix A, the Ground Water Remedial Action Protocol will apply to the investigation and remedial action for releases and groundwater contamination associated with chemigation systems. The remedial action workplan is to be carried out by the permit holder under the supervision of the Department or the district.

08 Certifications. Any person who has a certification revoked pursuant to Neb. Rev. Stat. § 46-1129.01 will be afforded an opportunity for a fair hearing as provided in Neb. Rev. Stat. §81- 1507(2)(3). The hearing will be held upon written application to the director within thirty days

after receipt of the notice from the director of such revocation. The hearing will be considered conducted as a contested case subject to Title 115, Rules of Practice and Procedure.

Enabling Legislation: Neb. Rev. Stat. §§ 46-1120, 46-1136

NEBRASKA ADMINISTRATIVE CODE Title 195 -

CHEMIGATION REGULATIONS

Chapter 2 - DISTRICT RESPONSIBILITIES

01 Fees. The district will forward the fees for the first half of the calendar year to the Department by September 1 of the calendar year and the fees for the last half of the calendar year by March 1 of the following year.

02 Annual Reports. The district will submit its annual report to the Department by March 1 of each year. In addition to the statutory requirements, the report will include:

- 02.01 The number of chemigation system inspections made by the district at each permitted injection site and whether the inspections were initial inspections, for equipment replacement or repair, or routine monitoring; and
- 02.02 The name of all chemicals and estimated amounts used in chemigation systems within the district the previous year.

03 Retention. The district is to maintain each application, or the information contained in the application for a period of five years and will provide such information to the Department upon request.

04 Special Permits. The district will provide the following information, at a minimum, to the Department when seeking a determination on a special permit as set forth in Neb. Rev. Stat. § 46-1117.01:

- 04.01 Name, address and telephone number of the applicant.
- 04.02 Legal description of the system location.
- 04.03 U.S. Geological survey map showing the system layout topographically with the location and elevation of existing equipment and injection location indicated.
- 04.04 Location, nominal diameter and length of all pipe in the irrigation distribution system.

05 Equipment. If the district finds that replaced or altered equipment does not comply with the standards set forth in this Title, the permit is to be suspended until compliance is demonstrated and approval for operation is given by the district.

Enabling Legislation: Neb. Rev. Stat. § 46-1136

NEBRASKA ADMINISTRATIVE CODE Title 195 -

CHEMIGATION REGULATIONS

Chapter 3 - EQUIPMENT; STANDARDS, INSTALLATION, MAINTENANCE

01 Equipment. Any irrigation distribution system, except an open discharge system, through which chemigation is performed is to be equipped with the mechanical devices specified in paragraphs 002 through 007 of this Chapter. The equipment is to be installed in accordance with the manufacturer's specifications and at the location specified. This will not be construed to prevent the use of portable chemigation equipment if such equipment meets the requirements of this chapter.

02 Irrigation pipeline check valve. The check valve is to be capable of preventing a mixture of water and chemical from draining or siphoning back into the irrigation water source. It is to be located in the pipeline between the irrigation pump and the point of chemical injection into the irrigation pipeline.

02.01 Existing irrigation distribution systems which, as of July 1, 1987, are equipped with a properly located check valve will be considered in compliance, until repaired or replaced, if the valve provides a watertight seal against reverse flow.

02.02 Irrigation distribution systems which are not equipped with a check valve or contain a check valve which after repair cannot meet the requirement in 002.01, are to be equipped with a check valve as specified in Chapter 3, 008.

02.03 For check valves manufactured or assembled after July 1, 1987, the manufacturer of the valve assembly is to provide verification to the director that the valve model has been tested and certified by an independent laboratory as meeting the criteria specified in Appendix I.

02.04 All check valves installed on an irrigation distribution system after January 1, 1988, are to be models certified to the director as specified in 002.03 above.

03 Vacuum relief valve. The vacuum relief valve is to be located on the pipeline between the irrigation pump and the irrigation pipeline check valve. It is to be capable of preventing the creation of a vacuum when the water flow stops. If the valve connection will also serve as the inspection port, the permitholder will ensure removal of the valve at the time of inspection.

04 Inspection port. The inspection port or other viewing device is to be located on the pipeline between the irrigation pump and the irrigation pipeline check valve.

04.01 The inspection port or viewing device is to be situated in such a manner that the inlet to the low-pressure drain can be observed.

04.02 A minimum four-inch diameter orifice or viewing area is required for systems without an existing port or device after January 1, 1988.

05 Low-pressure drain. The low-pressure drain is to be located on the bottom of the horizontal pipe between the irrigation pump and the irrigation pipeline check valve. Its purpose is to drain any mixture of water and chemical away from the irrigation water source.

05.01 The drain is to be constructed of corrosion resistant material or otherwise coated or protected to prevent corrosion;

05.02 The drain is to have an orifice of at least three-quarter inch diameter and is not to extend into the horizontal pipe beyond the inside surface of the bottom of the pipe; and

05.03 When the pipeline water flow stops, the drain will automatically open. A tube, pipe or similar conduit is to be used to discharge the solution at least twenty feet from the irrigation water source.

06 Chemical injection line check valve. The chemical injection line check valve is to be located between the point of chemical injection into the irrigation pipeline and the chemical injection pump.

06.01 The valve is to be constructed of chemically resistant materials;

06.02 The valve is to be designed to prevent irrigation water under operating pressure from entering the chemical injection line; and

06.03 The valve is to be designed to have a minimum opening (cracking) pressure of ten psi. When the chemical injection pump is shut down, the valve must prevent any leakage from the chemical supply tank.

06.04 As an alternative to the minimum opening pressure requirement in 006.03 above, a vacuum relief valve may be placed in the injection line between the chemical injection line check valve and chemical injection pump. The vacuum relief valve is to be constructed of chemically resistant materials, is to open at atmospheric pressure, is to be at an elevation greater than the highest part of the chemical supply tank and is also to be the highest point in the injection line.

07 Simultaneous interlock device. The irrigation pumping plant and the chemical injection pump are to be interlocked so that if the pumping plant stops, the injection pump will also stop.

08 Replacement equipment is to meet the requirements of this Chapter, and in the case of irrigation pipeline check valves, will meet the following minimum requirements:

08.01 The valve body and all components will be constructed of corrosion resistant materials or otherwise coated or protected to prevent corrosion;

08.02 The valve will contain a sealing mechanism designed to close prior to or at the moment water ceases to flow in the downstream direction. This mechanism will be either diaphragm-actuated by hydraulic line pressure, spring loaded, or weight loaded to provide a watertight seal against reverse flow;

08.03 The valve will be designed to meet the leakage tests specified in Underwriters Laboratory, Inc., Standard UL 312, Chapter 16, Leakage Test, page 11, dated May 22, 1984. (Appendix I).

08.04 All moving components of the valve will be designed to prevent binding, distortion or misalignment during water flow; and

08.05 The valve will be designed to allow for easy repair and maintenance, including removal from the pipeline if required to perform such work.

09 Maintenance. The equipment required in these rules and regulations is to be maintained in working condition during all times of chemigation. When required, the equipment is to be repaired to its originally designed condition.

Enabling Legislation: Neb. Rev. Stat. §§ 46-1127, 46-1136

Appendix I

Leakage Test

1. A check valve must withstand for 1 minute, without leakage at joints or at the valve seat, an internal hydrostatic pressure of two times the rated working pressure of the valve. Slight weeping of water at the valve seat is acceptable for metal-to-metal seats. Leakage past clappers with, or in contact with, resilient seats, is not acceptable.

2. For the purposes of the test, "slight weeping" is defined as leakage not exceeding 1 fluid ounce per hour (0.008 mL/ sec) per inch (25.4 mm) of nominal valve size.

3. A Check valve must withstand for 16 hours, without leakage at the valve seat, an

internal hydrostatic pressure equivalent to the head of a column of water 5 feet (1,5 m) high retained within the downstream portion of the valve body. No leakage may occur as evidence by wetting of paper placed beneath the valve assembly. This test is to be conducted with the valve in both the horizontal and vertical position if intended for such use.

APPENDIX C

Leak Test

1. A check valve shall withstand for 1 minute, without leakage at joints or at the valve seat, an interval hydrostatic pressure of two times the rated working pressure of the valve. Slight weeping of water at the valve seat is acceptable for metal-to-metal seats. Leakage past clappers with, or in contact with, resilient seats, is not acceptable.
2. For the purposes of this test, “slight weeping” is defined as leakage not exceeding 1 fluid ounce per hour (0.008 mL/sec) per inch (25.4 mm) of nominal valve size.
3. A check valve shall withstand for 16 hours, without leakage at the valve seat, an internal hydrostatic pressure equivalent to the head of a column of water 5 feet (1.5 m) high retained within the downstream portion of the valve body. No leakage shall occur as evidenced by wetting of paper placed beneath the valve assembly. This test is to be conducted with the valve in both the horizontal and vertical position if intended for such use.

“This material is based on and taken, with permission from Underwriters Laboratories Inc. Standard for Safety for Check Valves For Fire-Protection Service, UL 312, Sixth Edition dated April 21, 1980, Copyright 1975, 1985 (by Underwriters Laboratories Inc.) copies of which may be purchased from Underwriters Laboratories Inc., Publications Stock, 333 Pfingsten Road, Northbrook, IL 60062.”

“UL shall not be responsible to anyone for the use of or reliance upon a UL Standard by anyone. UL shall not incur any obligation or liability for damages, including consequential damages, arising out of or in connection with the use, interpretation of, or reliance upon a UL Standard.”

APPENDIX D



NEBRASKA
DEPT. OF ENVIRONMENTAL QUALITY

This guidance document is advisory in nature but is binding on an agency until amended by such agency. A guidance document does not include internal procedural documents that only affect the internal operations of the agency and does not impose additional requirements or penalties on regulated parties or include confidential information or rules and regulations made in accordance with the Administrative Procedure Act. If you believe that this guidance document imposes additional requirements or penalties on regulated parties, you may request a review of the document.

00-051
2021

June,

Certified Chemigation Check Valve Models and Manufacturers

NOTE: Even though a model meets the testing criteria, each field installation must not leak when inspected by Natural Resources District personnel.

Ames Company, Inc.
P.O. Box 1387 Woodland, CA 95695
Model(s) Available: 8-inch
(A113-31)

Kroy Industries, Inc. Box 309
York, NE 68467
Model(s) Available: 8-inch F-F

API International, Inc. 12505 SW Herman Road
Tualatin, OR 97062
Model(s) Available: 4-inch (CMV-FL-4), 6-inch (CMV-FL-6), 8-inch (CMV-FL-8), 10-inch (CMV-FL-10)

Boice Crane Industries, Inc.
P.O. Box 429 Gothenburg, NE 69138
Model(s) Available: 8-inch

Clemons Sales Corp. 6983 Supply Way
Boise, ID 83705
Model(s) Available: 8-inch

Fresno Valves & Castings
P.O. Box 40 Selma, CA 93662
Model(s) Available: 4, 6, 8, 10, and 12-inch
available in Model CVW-150

Lake Co. Irrigation Systems
P.O. Box 2248
Bakersfield, CA 93303

**Model(s) Available: 4-inch, 6-inch, 8-inch,
and 10-inch**

Lindsay Mfg. Co.
P.O. Box 156
Lindsay, NE 68644

Model(s) Available: 8-inch

Midwest Irrigation
Co. Box 516
Henderson, NE 68371

Model(s) Available: 4-inch (CVP-4), 6-inch

Northern Pump & Irrigation Co. Box 576
Henderson, NE 68371

**Model(s) Available: 6-inch (6NCCVFF; 6331-
6NCCVFF), 8-inch (8NCCVFF; 6331-
8NCCVFF), 10-inch (10NCCVFF).** [Availability
includes FF, FC, TC, PP, PE and PC models]

Pierce Corporation
P.O. Box 528
Eugene, OR 97440

Model(s) Available: 6-inch, 8-inch, 10-inch

Reinke Mfg. Co., Inc.
P. O. Box 566
Deshler, NE 68340

**Model(s) Available: 8-inch (CV 8 [Blue River
□])**

T-L Irrigation Co.
P.O. Box 1047
Hastings, NE 68901

Model(s) Available: 6-inch, 8-inch, 10-inch. (T-L
valves also sold by Agri-Inject, Inc. of
Yuma, CO under an agreement with T-L
Irrigation)

Gheen Irrigation Works, Inc. 29475
Airport Road
Eugene, OR 97402

(CVP-6 & CVM-6, **8-inch** (CVP-8 & CVM-8 &
CVMW-8), **10-inch** (CVP-10), **12-inch** (CVP-
12)

Morrill Industries, Inc.
22223 South Brennan
Escalon, CA 95320

**Model(s) Available: 4-inch (1533-04), 6-inch
(1533-06), 8-inch (1533-08), 10-inch (1533-
10), 12-inch (1533-12), 14-inch (1533-14), 16-
inch (1533-16**

**Model(s) Available: 3-inch (CMV-FL3), 4-
inch (CMV-FL4), 6-inch (CMV-FL6), 8-
inch (CMV-FL8), 10-inch (CMV-FL10), 12-
inch (CMV-FL12)**

Valmont Industries, Inc. Valley, NE 68064
**Model(s) Available: 8-inch (1K01813;
1K01814; 1K01819)**

Water Specialties Corp. 191 W. Poplar
Avenue Porterville, CA 93257

**Model(s) Available: 6-inch (ML-CV 6), 8-
inch (ML-CV 8), 10-inch (ML-CV 10), 12-
inch (ML- CV 12)**

Waterman Industries, Inc.
P.O. Box 458 Exeter, CA 93221

**Model(s) Available: 4-inch (CPC-30), 6-inch
(CPC-30 & -30B), 8-inch CPC-30 & -30B);
10- inch (CPC-30 & -30B)**

APPENDIX E

IRRIGATED ACREAGES

Irrigated acreage, when combined with the crop water needs, form the basis for the system water requirement. Thus, accurate field measurements properly size the center pivot and also help determine the volume of water to be pumped.

1. Determine the precise field dimensions and draw a scaled field map. Label all dimensions.

2. Generally, the pivot is located to provide the largest possible center pivot system.

NOTE: Allow at least 5' end gun clearance from obstructions.

3. Locate pivot and draw circles of radius equal to system length (including overhang) and effective end gun coverage.

NOTE: Maintain 30' clearance between end gun and any roadway, and 50' clearance from any high voltage power lines.


4. With a corner system, the pivot is located to allow the largest possible basic center pivot and to allow corner arm extension to the maximum acres beyond the reach of the basic system.

NOTE: The last tower on the **basic system** of a corner system should miss all obstructions by 30-35 feet.


5. Segment the irrigated area into parts of a circle and into triangles and label dimensions.

Compute the area of each segment, then sum the areas for the total acreage.

CONVENTIONAL ELECTRIC OR WATER DRIVE CENTER PIVOT

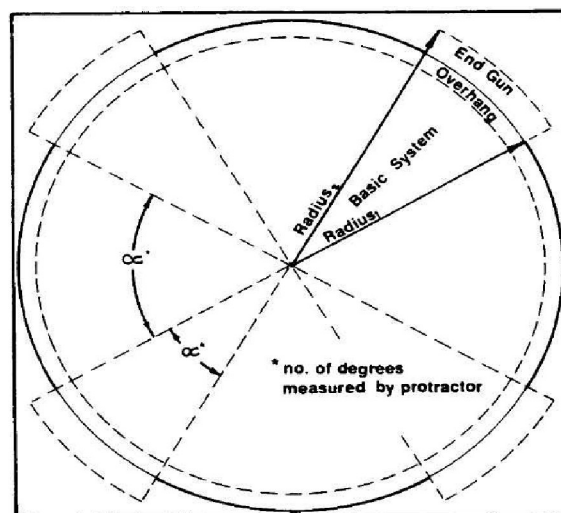

CORNER SYSTEM

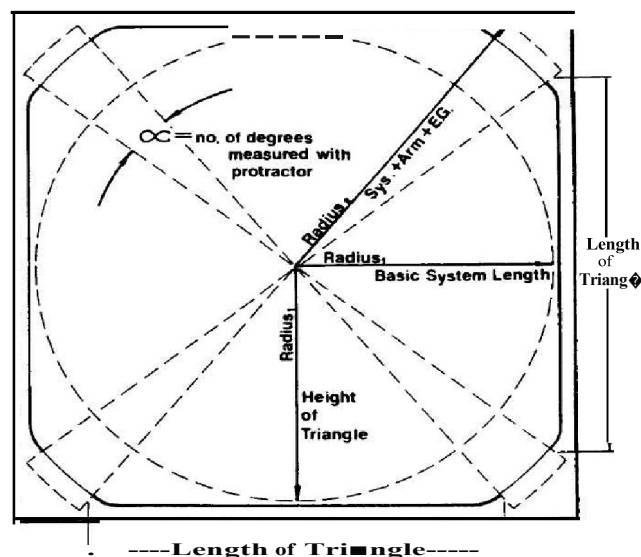

The effective lengths of the Corner System swing anns are:

170' Span cc: 243'
185' Span = 258'
plus

effective E.G. Coverage (See Water Application Section)

DETERMINE IRRIGATED ACREAGE

Formulas for calculating acreages in fields and segments are shown below:

1. **Area of a square = L^2**

"L" is the length in feet of one side of the square.

if $L = 2640'$ 

Area = $6,969,600 \text{ sq. ft.}$
 Acres = $\frac{6,969,600}{43,560} = 160 \text{ acres}$

'One (1) Acre = $43,560 \text{ ft}^2$

Acres = $\frac{\text{ft}^2}{43,560 \text{ ft. sq.}}$

2. Area of a rectangular field. (A)

Area = $L \times L2$

Area = $2640' \times 5280'$
 = $13,939,200$

Acres = $\frac{13,939,200 \text{ sq. ft.}}{43,560} = 320 \text{ acres}$



3. Area of a circle

Area = $R^2 \times 1f'$

If $R = 1300$

A = $1300^2 \times 3.14$
 = $5,309,291$

Acres = $\frac{5,309,291 \text{ sq. ft.}}{43,560 \text{ sq. ft.}} = 121.88 \text{ acres}$

($1f' = 3.1416$)

G

4. Area of a part circle

Area = $(R^2 \times 1f') \times \frac{oc}{360}$

R

If $R = 1300$ & $oc = 270^\circ$

Area = $(1300^2 \times 3.14) \times \frac{(270)}{360}$
 = $3,981,968 \text{ ft}^2$

Acres = $\frac{3,981,968 \text{ ft}^2}{43,560 \text{ ft}^2} = 91.41 \text{ acres}$

oc = number of degrees, measured with a protractor

5. Area of a triangle

Area = $\frac{H \times L}{2}$

If $H = 1300 \text{ ft.}$
 & $L = 1900 \text{ ft.}$

Area = $\frac{(1300)(1900)}{2} = 1,235,000 \text{ ft}^2$

Acres = $\frac{1,235,000}{43,560} = 28.4$

"H" is the same as system length and is equal to the "radius"


"L" is length of the base in the triangle

NOTE: To calculate (estimate) the **acreage** included in a very irregularly shaped area irrigated by a corner system, draw a straight line or a circular arc that will most nearly provide an "average" boundary.



On the following page you will find several typical examples incorporating the above segment formulas into whole field average calculations.

STANDARD ELEC/WATER DRIVE




FULL CIRCLE W/O E.G.

$$\text{Area} = \frac{R^2 \pi}{43560}$$

$$1294 \times \frac{1294 \times 3.1416}{43560}$$

$$= 120.7 \text{ Acres}$$




PART CIRCLE W/O E.G.

$$\text{Area} = \frac{R^2 \pi}{43560} \times \left(\frac{\alpha}{360} \right)$$

$$= \frac{1294 \times 1294 \times 3.1416}{43560} \times \frac{330}{360}$$

$$= 110.7 \text{ Acres}$$




FULL CIRCLE WITH E.G.

$$\text{Area} = \frac{R_1^2 \pi}{43560} + \frac{R_2^2 \pi}{43560} \times \left(\frac{\alpha}{360} \right)$$

$$= \frac{1294 \times 1294 \times 3.1416}{43560} + \frac{1364 \times 1364 \times 3.1416}{43560} \times \frac{30}{360}$$

$$= 125.2 \text{ Acres}$$



PART CIRCLE WITH E.G.

$$\text{Area} = \frac{R_1^2 \pi}{43560} \times \left(\frac{\alpha}{360} \right) + \frac{R_2^2 \pi}{43560} \times \left(\frac{\alpha}{360} \right)$$

$$= \frac{1294 \times 1294 \times 3.1416}{43560} \times \frac{330}{360} + \frac{1364 \times 1364 \times 3.1416}{43560} \times \frac{30}{360}$$

$$= 109.58 \text{ Acres}$$


CORNER SYSTEMS

FULL CIRCLE 4 CORNERS

$$\text{Area} = 4 \times \left[\frac{R_1^2 \pi}{43560} \right] + 4 \times \left[\frac{R_2^2 \pi}{43560} \times \left(\frac{\alpha}{360} \right) \right]$$

$$= 4 \times \left[\frac{(1294 \times 1294 \times 3.1416)}{43560} \right] + 4 \times \left[\frac{(1581 \times 1581 \times 3.1416 \times 14)}{43560 \times 360} \right]$$

$$= 150.3 \text{ Acres}$$




PART CIRCLE

$$\text{Area} = \frac{2 \times (R_1^2 \pi)}{43560} + \frac{2 \times (R_2^2 \pi)}{43560} \times \left(\frac{\alpha}{360} \right)$$

$$= \frac{2 \times (1294 \times 1294 \times 3.1416)}{43560} + \frac{2 \times (1581 \times 1581 \times 3.1416 \times 14)}{43560 \times 360}$$

$$= 139 \text{ Acres}$$




RECTANGULAR FIELD

$$\text{Area} = \frac{2 \times (R_1^2 \pi)}{43560} + 2 \times \left(\frac{R_2^2 \pi}{43560} \times \left(\frac{\alpha}{360} \right) \right)$$

$$= \frac{2 \times (1294 \times 1294 \times 3.1416)}{43560} + 2 \times \left(\frac{1581 \times 1581 \times 3.1416 \times 14}{43560 \times 360} \right)$$

$$= 169.8 \text{ Acres}$$




ODD SHAPE FIELD

$$\text{Area} = \frac{2 \times (R_1^2 \pi)}{43560} + 2 \times \left(\frac{R_2^2 \pi}{43560} \times \left(\frac{\alpha}{360} \right) \right)$$

$$= \frac{2 \times (1294 \times 1294 \times 3.1416)}{43560} + 2 \times \left(\frac{1581 \times 1581 \times 3.1416 \times 14}{43560 \times 360} \right)$$

$$= 137.64 \text{ acres}$$



NOTE: Lengths & Angles must be measured in the field or from maps, etc./The above dimensions & angles are only typical examples.

Determine Irrigated Acreage

DOT METHOD

The Dot Method can be very useful when calculating areas of non-circular or non-square fields. By simply counting the dots inside the field boundaries, and multiplying by a conversion factor, the acreage is determined. Note, however, that the field or aerial photo must be to a known scale.

1. Draw the field and irrigated area to scale or obtain an aerial photography and draw the system coverage on the photo. A scale of one inch = 660 feet is common with aerial photos and has a conversion factor of 0.156 acres/dot. On drawings of one inch = 330 feet, the conversion factor is 0.0391 acres/dot. Other conversion factors are listed on the overlay.
2. Lay the overlay over the map and ensure that it does not shift during the counting process. When dots fall on the area boundary, count every other dot.
3. Note the small squares contain four dots and major squares contain 64 dots; the counting of squares can greatly speed up the computation.
4. After all dots are counted, multiply this sum by the conversion factor to obtain acres.

Corner Machine Acreage Equations — Square Field

1. 170' swing spans:

- a. 85 end gun with 70' EGR

$$\text{Acres} = \frac{(\text{DLRDU}) 1.898}{10,000} \times 1.191$$

- b. 100 end gun with 90' EGR


$$\text{Acres} = \frac{(\text{DLRDU}) 1.898}{10,000} \times 1.876$$

2. 185' swing spans:

- a. 100 end gun with 90' EGR

$$\text{Acres} = \frac{(\text{DLRDU}) 1.898}{10,000} \times 1.887$$

DLRDU = Distance from pivot to last regular drive unit.

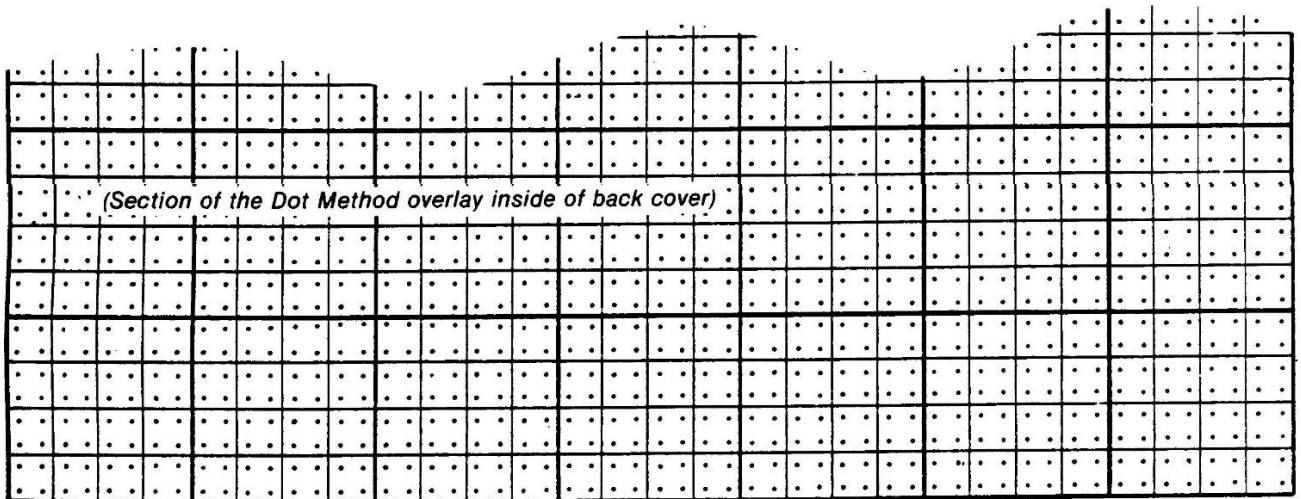

MODIFIED ACREAGE GRID — 64 DOTS PER SQUARE INCH

For maps of any scale, place grid over area to be measured; count dots and multiply by conversion factor to compute acreage. When dots fall on area boundary, count every other dot.

MAP SCALES, EQUIVALENTS, AND CONVERSION FACTORS

Fractional Scale	Inches Per Mile	Acres Per Square Inch	Conversion Factor Each Dot Equals:
1: 7,920	8.00	10.00	0.156 Acres
1: 9,600	6.60	14.692	0.230 Acres
1: 15,840	4.00	40.000	0.624 Acres
1: 20,000	3.168	63.769	0.966 Acres
1: 31,680	2.00	160.000	2.500 Acres
1: 63,360	1.00	640.000	10.000 Acres
1: 125,000	0.507	2,490.980	38.922 Acres
1: 250,000	0.253	9,963.906	155,686 Acres
1: 500,000	0.127	39,855.627	622.744 Acres

APPENDIX F

Fertilizer and Pesticide Containment **in Nebraska**

Do you have or use pesticide storage containers larger than 500 gallons?

Do you have or use fertilizer containers larger than 2,000 gallons or several containers adding to more than 3,000 gallons?

Do you apply pesticide or fertilizer solutions for hire?

If you answered yes to any of these questions you may be subject to the secondary containment regulations found in ***Title 198 - Rules and Regulations Pertaining to Agricultural Chemical Containment***, which require secondary containment (diking) and loadout facilities (load or rinse pad). Title 198 regulations were initially approved in 1992 and amended most recently in 2020. The regulations apply to both private and commercial storage, as well as commercial applicators of fertilizers and pesticides. Title 198 is administered by the Nebraska Department of Water, Energy, and Environment (NDWEE).

When is pesticide containment required? Secondary containment and a loadout facility are required when total, aggregated bulk pesticide storage capacity exceeds 500 gallons or when bulk dry pesticide is stored. Even if secondary containment is not required, a custom applicator must have a loadout facility when:

1. the custom applicator uses pesticides from original containers larger than 3 gallons,
2. bulk pesticides or fertilizers are loaded or unloaded from rail cars,
3. secondary containment is to be installed for bulk liquid pesticide stored in aggregate quantities greater than 500 gallons or bulk liquid fertilizer stored in aggregate quantities greater than 3,000 gallons
4. the custom applicator uses pesticide or fertilizer mixtures of more than 100 gallons.

Bulk or aggregated pesticide storage means the total amount of pesticide between all containers. For example, you have 3 containers of bulk pesticide and each one has a 200-gallon capacity. The combined capacity of the three containers is 600 gallons which exceeds the 500-gallon threshold, so secondary containment and a loadout facility is required.

Another example is a custom applicator who uses pesticides from 2.5-gallon containers but prepares a pesticide mixture that fills a 200-gallon tank mounted on a truck. Since the pesticide mixture exceeds the 100-gallon limit, a loadout facility is required unless all loadout activities (i.e., loading, rinsing, mixing, washing, etc.) are conducted at the application site as part of the

normal application.

The secondary containment and loadout facility requirements for pesticide storage and use have been in effect for everyone since January 1, 1995.

When is fertilizer containment required? The situations where bulk fertilizer storage must be contained are a little more complicated. Secondary containment is required when the capacity of a single container exceeds 2,000 gallons, when the capacity of two or more containers exceeds 3,000 gallons, or when fertilizer storage exceeds 25 percent of the container capacity for any container larger than 500 gallons any time between November 1 and March 15. One exception provided for in the 1999 amendment allows the use of one or more containers up to 6,000 gallons of combined capacity at the application site between March 15 and October 1 for 21 consecutive days or less without secondary containment, is 500 feet from surface water and 100 feet from wells, inspected for leakage annually before use, and is structurally sound and compatible with fertilizer being contained. However, this exception does not apply to containers used in chemigation and is specific to that application site.

For example, a 2,500-gallon stationary fertilizer container requires containment, as do two 1,600gallon containers (except at the application site as noted above). However, a single 1,600gallon container does not have to be contained as long as it does not have more than 400 gallons (i.e., 25 percent of 1,600) of fertilizer in it anytime between November 1 and March 15.

A loadout facility is required in conjunction with fertilizer storage when the stored amount exceeds 5,000 gallons. There is an exception for application site loadout activities, which would also apply to 6,000gallon fertilizer containers used at the application site as noted above.

Some other special situations and exceptions are worth noting. By definition, anhydrous ammonia, dry fertilizer, and animal and vegetable manure are not considered bulk fertilizer and are not subject to the Title 198 regulations. Normal application site loadout activities are generally exempt from the regulations. Containers designed and used for transportation and application site loadout activities are also excluded.

For example, a 2,500-gallon container mounted on a trailer and moved from application site to application site (such as field to field during the planting season) is not required to have containment or a loadout facility. A 6,000-gallon tip-tank or other similar type container moved to a field and set-up for use in that field between March 15 and October 1 and used for no more than 21 days also is not required to have containment or a loadout facility. However, these containment or loadout exceptions do not apply to trailer mounted or tip-tanks when these containers are used for chemigation or for satellite-type operations to other fields.

The transportation related and 6,000-gallon application site exceptions do not apply to containers used in chemigation. The regulations specify that any container used in the application of a bulk pesticide or bulk fertilizer through a chemigation system is considered storage and subject to the regulations and volume limits as appropriate. For example, a 2,100gallon container mounted on a truck or trailer and used only for chemigation during the summer is required to have secondary containment. But a single 1,600gallon container either placed on the ground or on a trailer and used for chemigation is not required to have secondary containment as long as it is not used for storage of more than 400 gallons (i.e., over 25 percent of its capacity) between November 1 and March 15.

No registration or permit is required. However, a construction plan is required and for new facilities it must include either certification from a Nebraska registered engineer that the

facility design complies with the regulations or be a generic or standardized design that has been approved by the NDWEE. One such standardized design was submitted and has been approved by the NDWEE for a reinforced concrete facility; those plans are available on request. Any change to a generic design must be certified by a professional engineer.

As with all its programs, NDWEE encourages voluntary compliance. However, NDWEE can seek court ordered injunctions, fines, or other legal remedies as provided for in the Nebraska Environmental Protection Act in order to obtain compliance with the regulations. The Department will conduct a number of compliance inspections during the year and has also worked out an agreement with the Pesticide Program of the Nebraska Department of Agriculture to provide for some additional inspections.

For specific information or a copy of the Title 198 regulations, please contact the Agriculture Section, Nebraska Department of Water, Energy, and Environment, P.O. Box 98922, Lincoln, Nebraska 68509, phone (402)471-4239, or visit our website at <https://dee.nebraska.gov/>

APPENDIX G

Disposing of Livestock Waste through **An Irrigation System**

NEBRASKA DEPARTMENT OF WATER, ENERGY, AND ENVIRONMENT

TITLE 130 Chapter 10 — DISPOSAL THROUGH AN IRRIGATION

DISTRIBUTION

SYSTEM; EQUIPMENT REQUIREMENTS

- 01* Any irrigation distribution system, except an open discharge system, through which livestock wastes are distributed shall be equipped with one of the mechanical devices specified in Paragraph *002* of this Chapter. The equipment shall be installed in accordance with the manufacturer's specifications and at the location specified. The purpose of this equipment is to prevent livestock wastes or a mixture of livestock wastes and water from being pumped, drained, or siphoned into the irrigation water source.
- 01.01* A livestock operation proposing to use an irrigation distribution system for disposal shall submit a plan to the Department for its approval detailing the type and location of mechanical devices to be installed.
- 01.02* An irrigation distribution system which is disconnected from the irrigation water source during livestock waste application shall be considered in compliance with the requirements set forth in this Chapter.
- 01.03* The Department will conduct an annual inspection of each injection location to determine compliance with this chapter. Inspections conducted by the Natural Resources Districts, pursuant to Title 195 (NAC), Rules and Regulations Pertaining to Chemigation, will qualify as meeting the requirements of this Chapter.
- 02* Irrigation pipeline check valve assembly. The check valve assembly may be one component or a combination of components consisting of an irrigation pipeline check valve, vacuum relief valve, inspection port and low pressure drain. The assembly shall be located in the pipeline between the irrigation pump and the point of livestock wastes injection into the irrigation pipeline.
- 02.01* Irrigation pipeline check valve. The check valve shall be located in the pipeline between the irrigation pump and the point of livestock wastes injection into the irrigation pipeline.
- 002.01A* Existing irrigation distribution systems which, as of the date of these rules and regulations, are equipped with a properly located check valve shall be considered in compliance if the valve provides a watertight seal against reverse flow.

002.01B Irrigation distribution systems which are not equipped with a check valve or contain a check valve which after repair cannot provide a watertight seal against reverse flow shall be equipped with a check valve model certified to the director as meeting the leakage test requirements in Appendix C, Title 195 (NAC), Rules and Regulations Pertaining to Chemigation.

02.02 Vacuum relief valve. The vacuum relief valve shall be located on the pipeline between the irrigation pump and the irrigation pipeline check valve. Its purpose is to prevent creation of a vacuum when the water flow stops.

02.03 Inspection port. The inspection port or other viewing device shall be located on the pipeline between the irrigation pump and the irrigation pipeline check valve. In many cases the vacuum relief valve connection can serve as the inspection port.

002.03A The inspection port or viewing device shall be situated in such a manner that the inlet to the low-pressure drain can be observed.

002.03B A minimum four-inch diameter orifice or viewing area is required.

02.04 Low-pressure drain. The low-pressure drain shall be located on the bottom of the horizontal pipe between the irrigation pump and the irrigation pipeline check valve. Its purpose is to drain any mixture of water and livestock waste away from the irrigation water source.

002.04A The drain shall be constructed of corrosion resistant material or otherwise coated or protected to prevent corrosion.

002.04B The drain shall have an orifice of at least three-quarter inch diameter and shall not extend into the horizontal pipe beyond the inside surface of the bottom of the pipe; and

002.04C When the pipeline water flow stops, the drain will automatically open. A tube, pipe or similar conduit shall be used to discharge the solution at least 20 feet from the irrigation water source.

Enabling Legislation: Neb. Rev. Stat. §§81-1504(10)(12)(21); 81-1505(10)

Legal Citation: Title 130, Ch. 10, Nebraska Department of Water, Energy, and Environment

APPENDIX H

Nebraska Natural Resources Districts

Upper Big Blue NRD

105 Lincoln Avenue
York, NE 68467
Voice: (402) 363-6601
Fax: (402) 362-1849

Lower Big Blue NRD

805 Dorsey Street
Box 826
Beatrice, NE 68310
Voice: (402) 228-3402
Fax: (402) 223-4441

Lower Elkhorn NRD

601 East Benjamin Avenue, Suite 101
Norfolk, NE 68702
Voice: (402) 371-7313
Fax: (402) 371-0653

Little Blue NRD

100 East 6th Street
P.O. Box 100
Davenport, NE 68335
Voice: (402) 364-2145
Fax: (402) 364-2484

Upper Loup NRD

39252 Hwy 2
P.O. Box 212
Thedford, NE 69166
Voice: (308) 645-2250
Fax: (308) 645-2308

Lower Loup NRD

2620 Airport Drive
P.O. Box 210
Ord, NE 68862
Voice: (308) 728-3221
Fax: (308) 728-5669

Lewis & Clark NRD

608 North Robinson Ave.
P.O. Box 518
Hartington, NE 68739
Voice: (402) 254-6758
Fax: (402) 254-6759

Papio-Missouri River NRD

8901 South 154th Street
Omaha, NE 68138-3621
Voice: (402) 444-6222
Fax: (402) 895-6543

Nemaha NRD

62161 Hwy 136
Tecumseh, NE 68450
Voice: (402) 335-3325
Fax: (402) 335-3265

Upper Niobrara-White NRD

430 East 2nd Street
Chadron, NE 69337
Voice: (308) 432-6190
Fax: (308) 432-6187

Middle Niobrara NRD

526 East First
Valentine, NE 69201
Voice: (402) 376-3241 or
Fax: (402) 376-1040

Lower Platte North NRD

511 Commercial Park Road
P.O. Box 126
Wahoo, NE 68066
Voice: (402) 443-4675
Fax: (402) 443-5339

Lower Niobrara NRD

410 Walnut Street
P.O. Box 350
Butte, NE 68722
Voice: (402) 775-2343
Fax: (402) 775-2334

Lower Platte South NRD

3125 Portia Street
Lincoln, NE 68501-3581
Voice: (402) 476-2729
Fax: (402) 476-6454

North Platte NRD

100547 Airport Road
P.O. Box 280
Scottsbluff, NE 69363-0280
Voice: (308) 632-2749
Fax: (308) 632-4346

Upper Republican NRD

511 East 5th Street
P.O. Box 1140
Imperial, NE 69033
Voice: (308) 882-5173 or 882-5584
Fax: (308) 882-4521

South Platte NRD

551 Parkland Drive
P.O. Box 294
Sidney, NE 69162-0294
Voice: (308) 254-2377
Fax: (308) 254-2783

Middle Republican NRD

220 Center
P.O. Box 81
Curtis, NE 69025
Voice: (308) 367-4281 or 800-873-5613
Fax: (308) 367-4285

Twin Platte NRD

TierOne Bank Center
111 South Dewey Street
P.O. Box 1347
North Platte, NE 69103-1347
Voice: (308) 535-8080
Fax: (308) 535-8207

Lower Republican NRD

30 North John Street
P.O. Box 618
Alma, NE 68920-0168
Voice: (308) 928-2182 or (800) 353-1297
Fax: (308) 928-2317

Central Platte NRD

215 Kaufman Avenue
Grand Island, NE 68803
Voice: (308) 385-6282
Fax: (308) 385-6285

Tri-Basin NRD

1723 North Burlington
Holdrege, NE 68949
Voice: (308) 995-6688 or (877) 995-6688
Fax: (308) 995-6992

Upper Elkhorn NRD

301 North Harrison

O'Neill, NE 68763

Voice: (402) 336-3867

Fax: (402) 336-1832

UNL EXTENSION PUBLICATIONS

Following are the titles of several NebGuides and Extension Circulars on topics relating to chemigation. Single copies of these publications are available upon request without charge at local Cooperative Extension offices. Copies of these publications and others are available online at the following URL: <http://extensionpubs.unl.edu>

EC782	Water Quality Criteria for Irrigation
G1712	Application Uniformity of In-Canopy Sprinklers
G1851	Minimum Center Pivot Design Capacities in Nebraska
G1328	Water Loss from Above-Canopy and In-Canopy Sprinkler
G888	Flow Control Devices for Center Pivot Irrigation Systems
G1124	Converting Center Pivot Sprinkler Packages: System Considerations
G2033	Nebraska Pesticide Container and Secondary Containment Rules
EC3006	Worker Protection Standard for Agricultural Establishments
G1736	Rinsing Pesticide Containers
G1773	Spray Drift of Pesticides
G758	Protective Clothing and Equipment for Pesticide Applicators
EC2505	Managing the Risk of Pesticide Poisoning and Understanding the Signs and Symptoms
EC2008	Irrigation and Nitrogen Management: <i>User Education/Certification Program</i>
EC117	Fertilizer Suggestions for Corn
G1955	Understanding the Pesticide Label
EC2009	Basic Soil and Water Resources and Irrigation Engineering/Agricultural Water Management and Related Terminology
G2000	Tillage and Crop Residue Affect Irrigation Requirements
EC3017	Center Pivot Irrigation Handbook
EC776	Advantages and Disadvantages of Subsurface Drip Irrigation
EC732	Irrigation Efficiency and Uniformity, and Crop Water Use Efficiency
EC2000	Variable Rate Application of Irrigation Water with Center Pivots
EC778	Application of Liquid Animal Manures Using Center Pivot Irrigation Systems
G1850	Irrigation Management for Corn
EC3002	Soil Water Sensors for Irrigation Management
EC3036	Irrigation Scheduling Strategies When Using Soil Water Data
G1367	Irrigating Soybean
G758	Protective Clothing and Equipment for Pesticide Applicators

